



REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	APR 24/06	L.CHAN
B		PROPOSAL	FEB 15/08	L.CHAN
C		PROPOSAL	FEB 28/11	L.CHAN

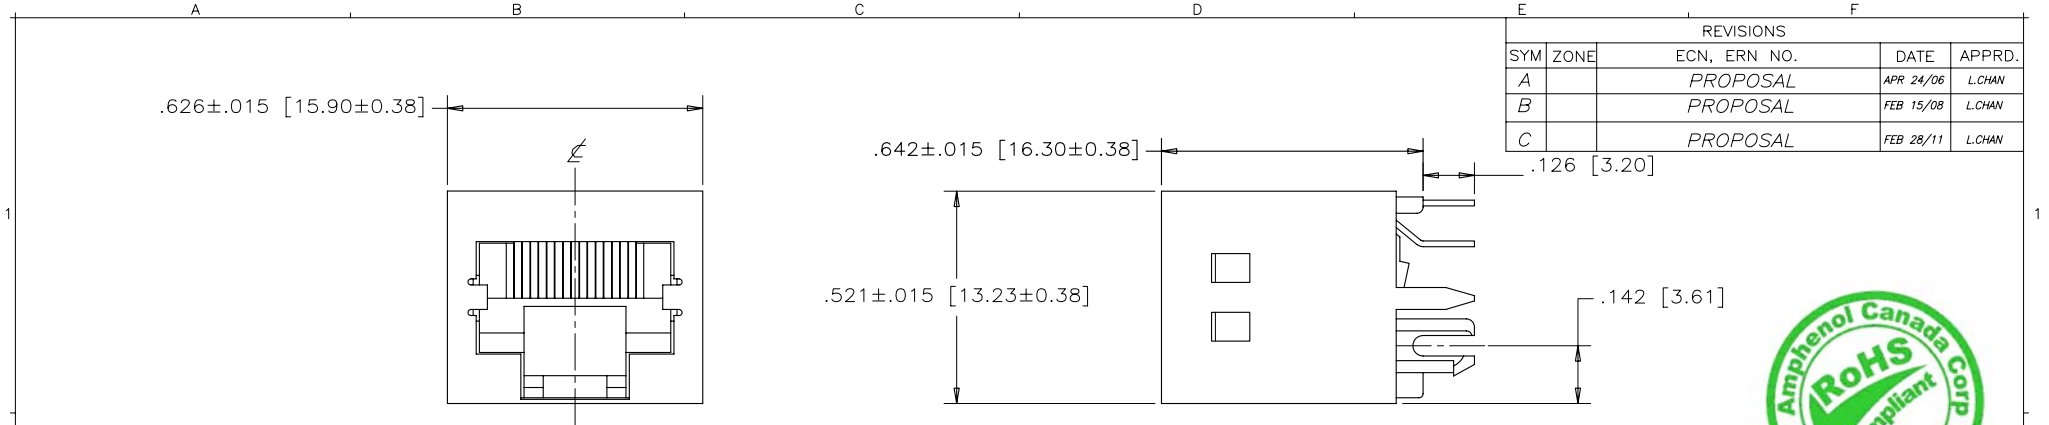


FRONT VIEW

SIDE VIEW

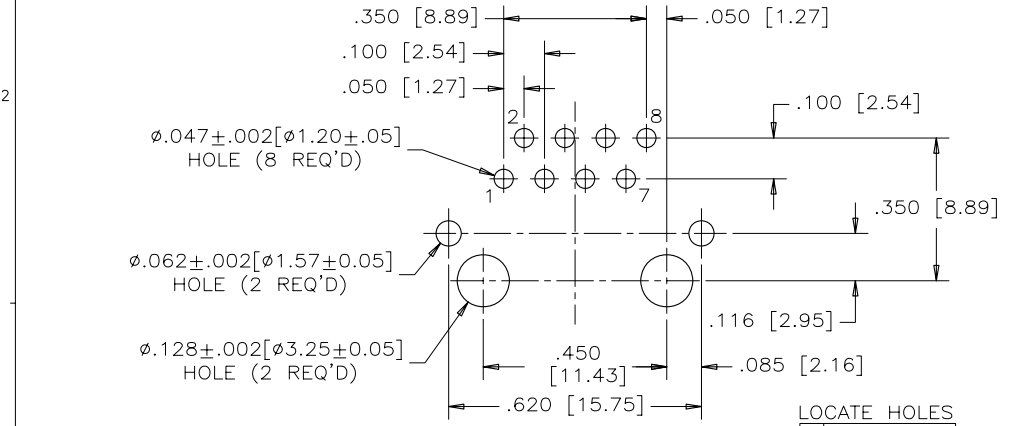

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES
⌀ .005 [0.13]
POSITION DIMENSIONS
ARE BASIC

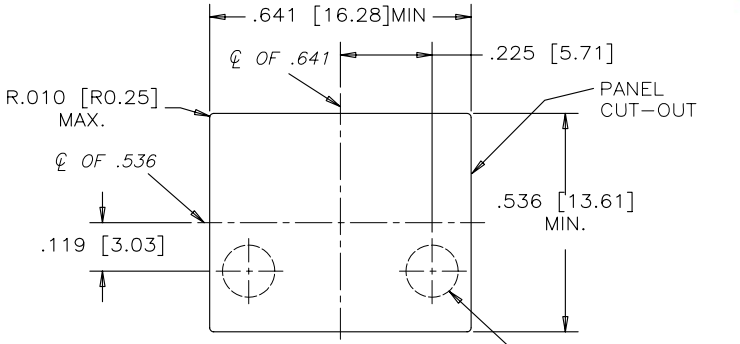

PANEL CUT-OUT

PCB HOLE REFERENCE

MATERIALS:
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL94V-0

CONTACTS:
PHOSPHOR BRONZE
PLATING: REFER TO PART NUMBER FOR GOLD
THICKNESS ON MATING SURFACES.
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE.
100 μ" [2.54 MICRONS]
MIN. MATTE-TIN OR GOLD FLASH ON CONTACT TAILS.

SHIELD:
COPPER ALLOY
PLATING: NICKEL

RECOMMENDED SOLDERING TEMPERATURE:
xt50.99; WAVE SOLDERING 0 AT 240° C MAXIMUM FOR 5 SEC MAXIMUM.

AMPHENOL PART NUMBER: R J E 0 6 - 1 8 8 - 1 X 1 0

SERIES: R
1 PORT: J
NO. OF POSITIONS: E
NO. OF CONTACTS: 0
STANDARD: 6
WITHOUT FLANGE: 8
GOLD PLATING: 1
1 = 6 MICRO"
2 = 15 MICRO"
3 = 30 MICRO"
4 = 50 MICRO"
FULL SHIELD: 0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±0.012 INCHES [0.30 mm]	DRAWN PAULW	DATE APR24/06	Amphenol Canada Corp.		
	DESIGNED				
	CHECKED CHIGOW	APR24/06	TITLE RJE06 SERIES, 8 POSITION, 8 CONTACT VERTICAL MOUNT, WITH SHIELD NON FLANGE - RoHS COMPLIANT		
	I. E. APPRD.				
	Q. A. APPRD.				
	DWG. APPRD.		P-RJE06-188-1X10		
	ENG. REL. NO.				
	REF. EAR # 060415		DWG	DRAWING NO.	REV. C
	DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554	SCALE	WT.	SURF.
					SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.