

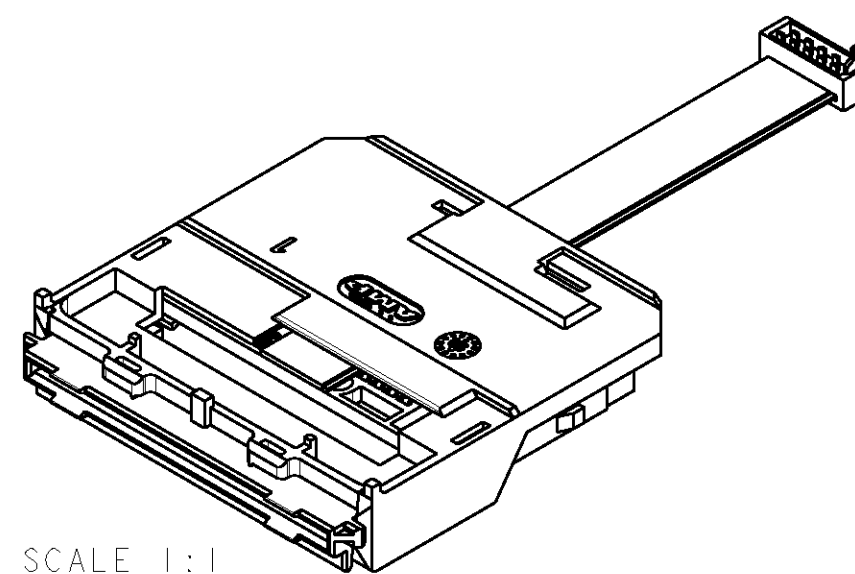
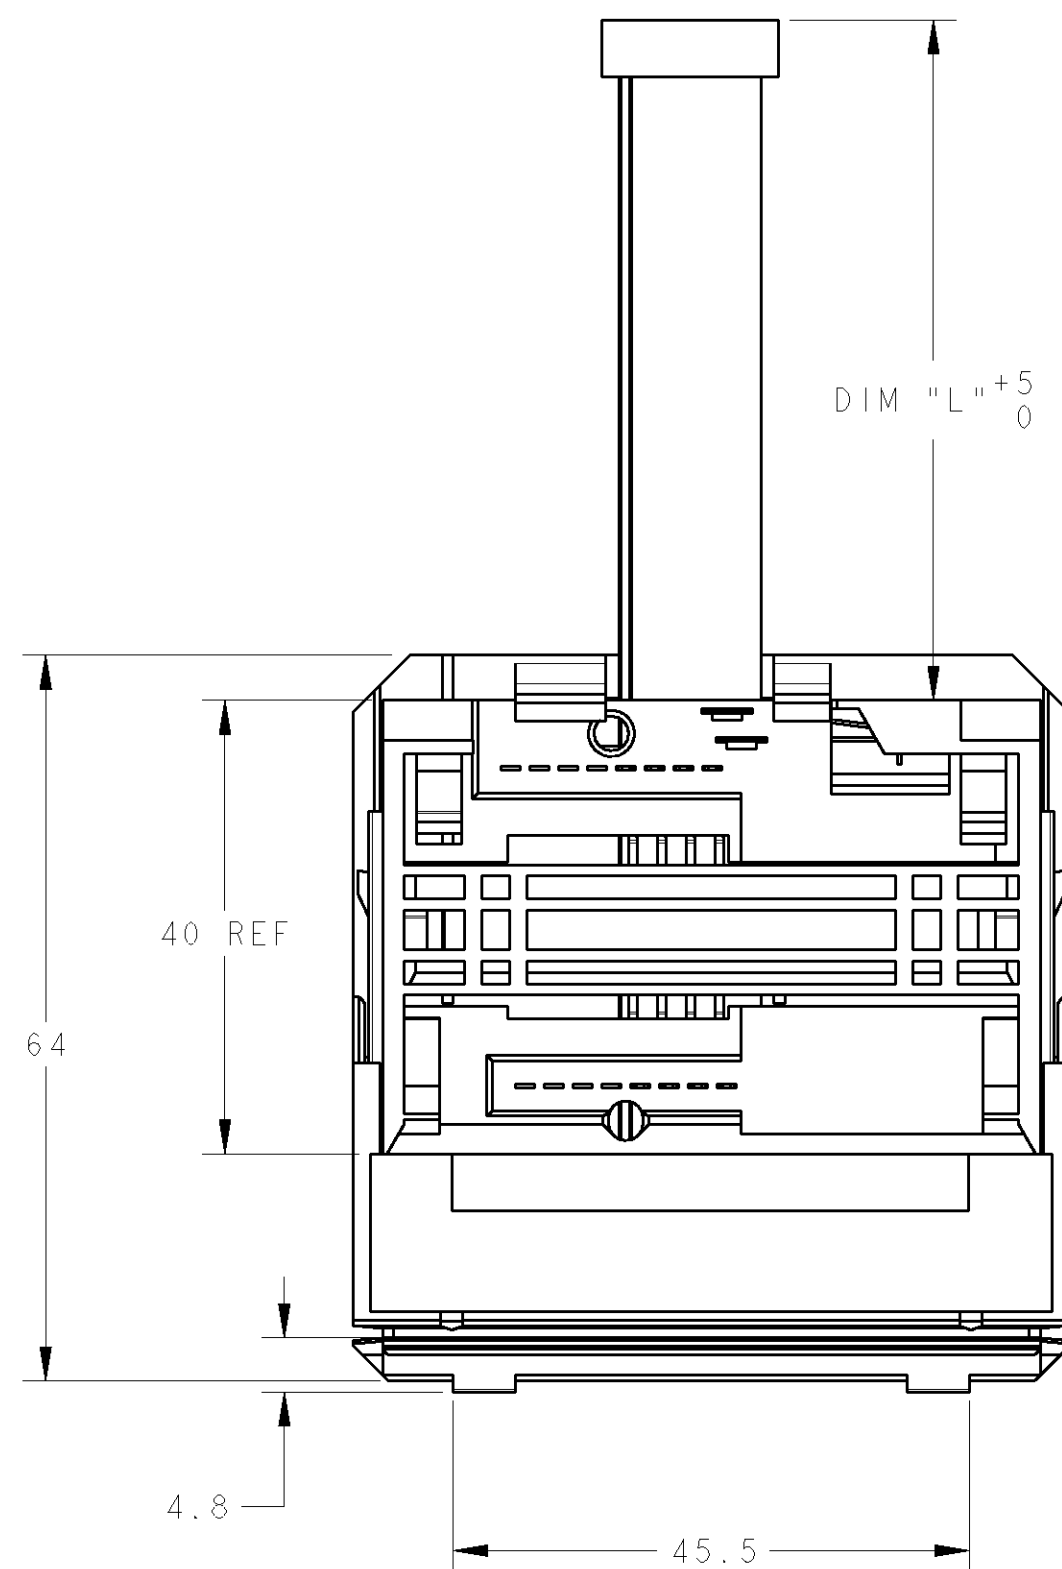
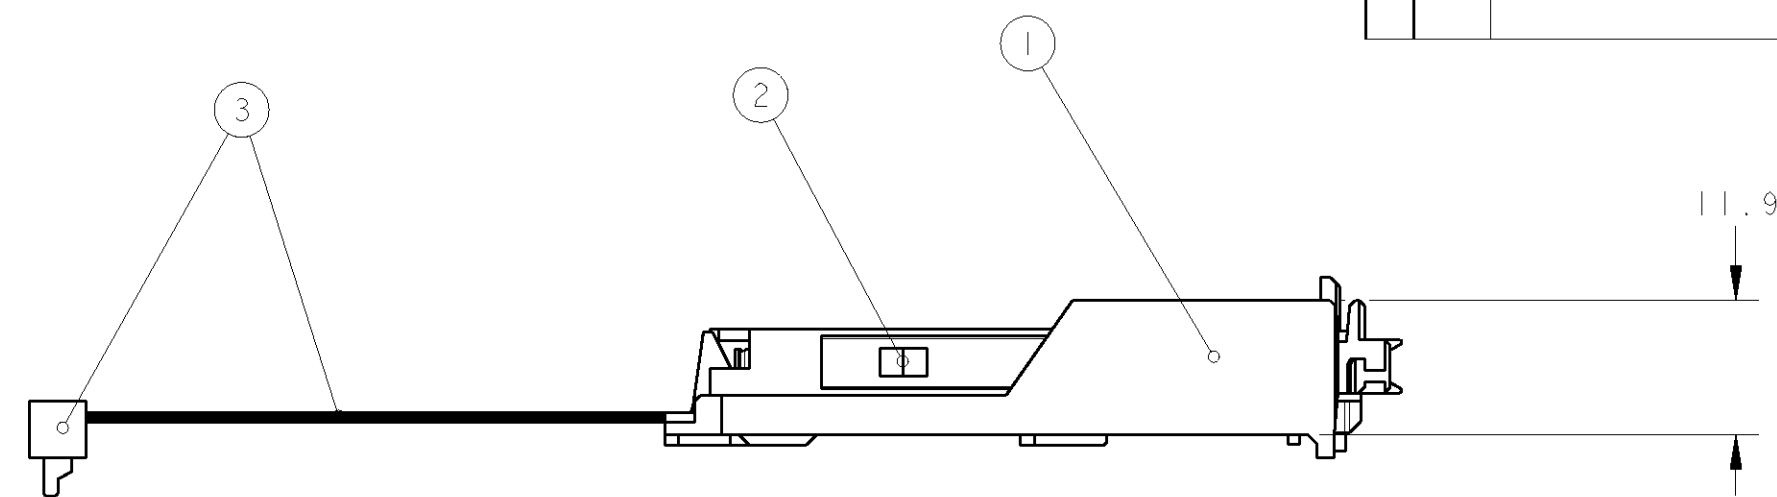
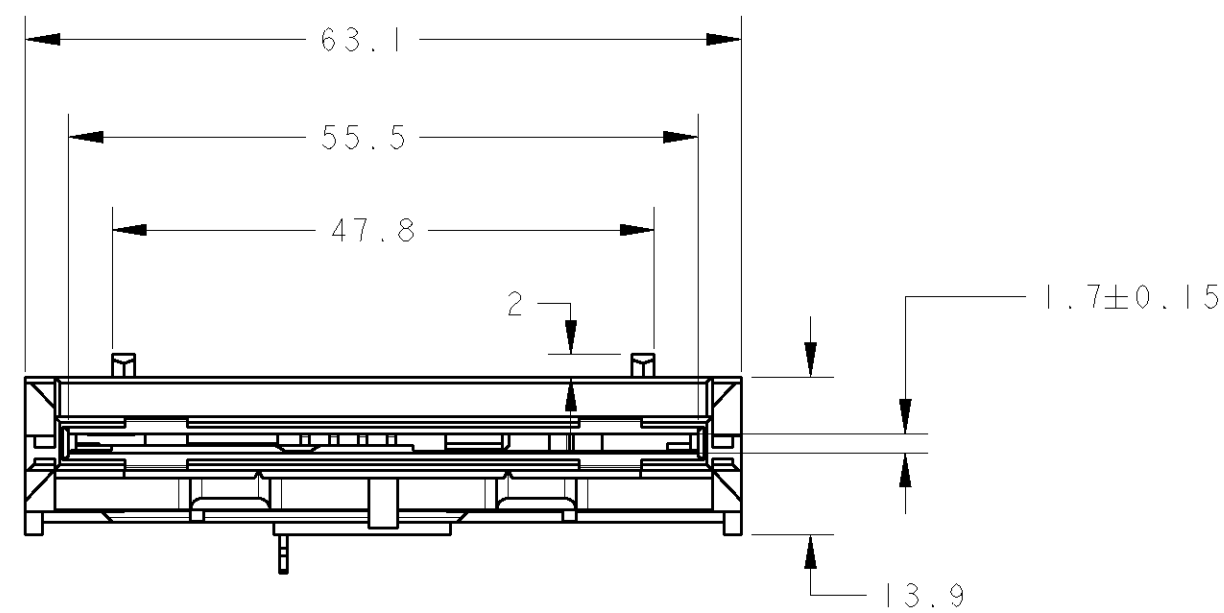
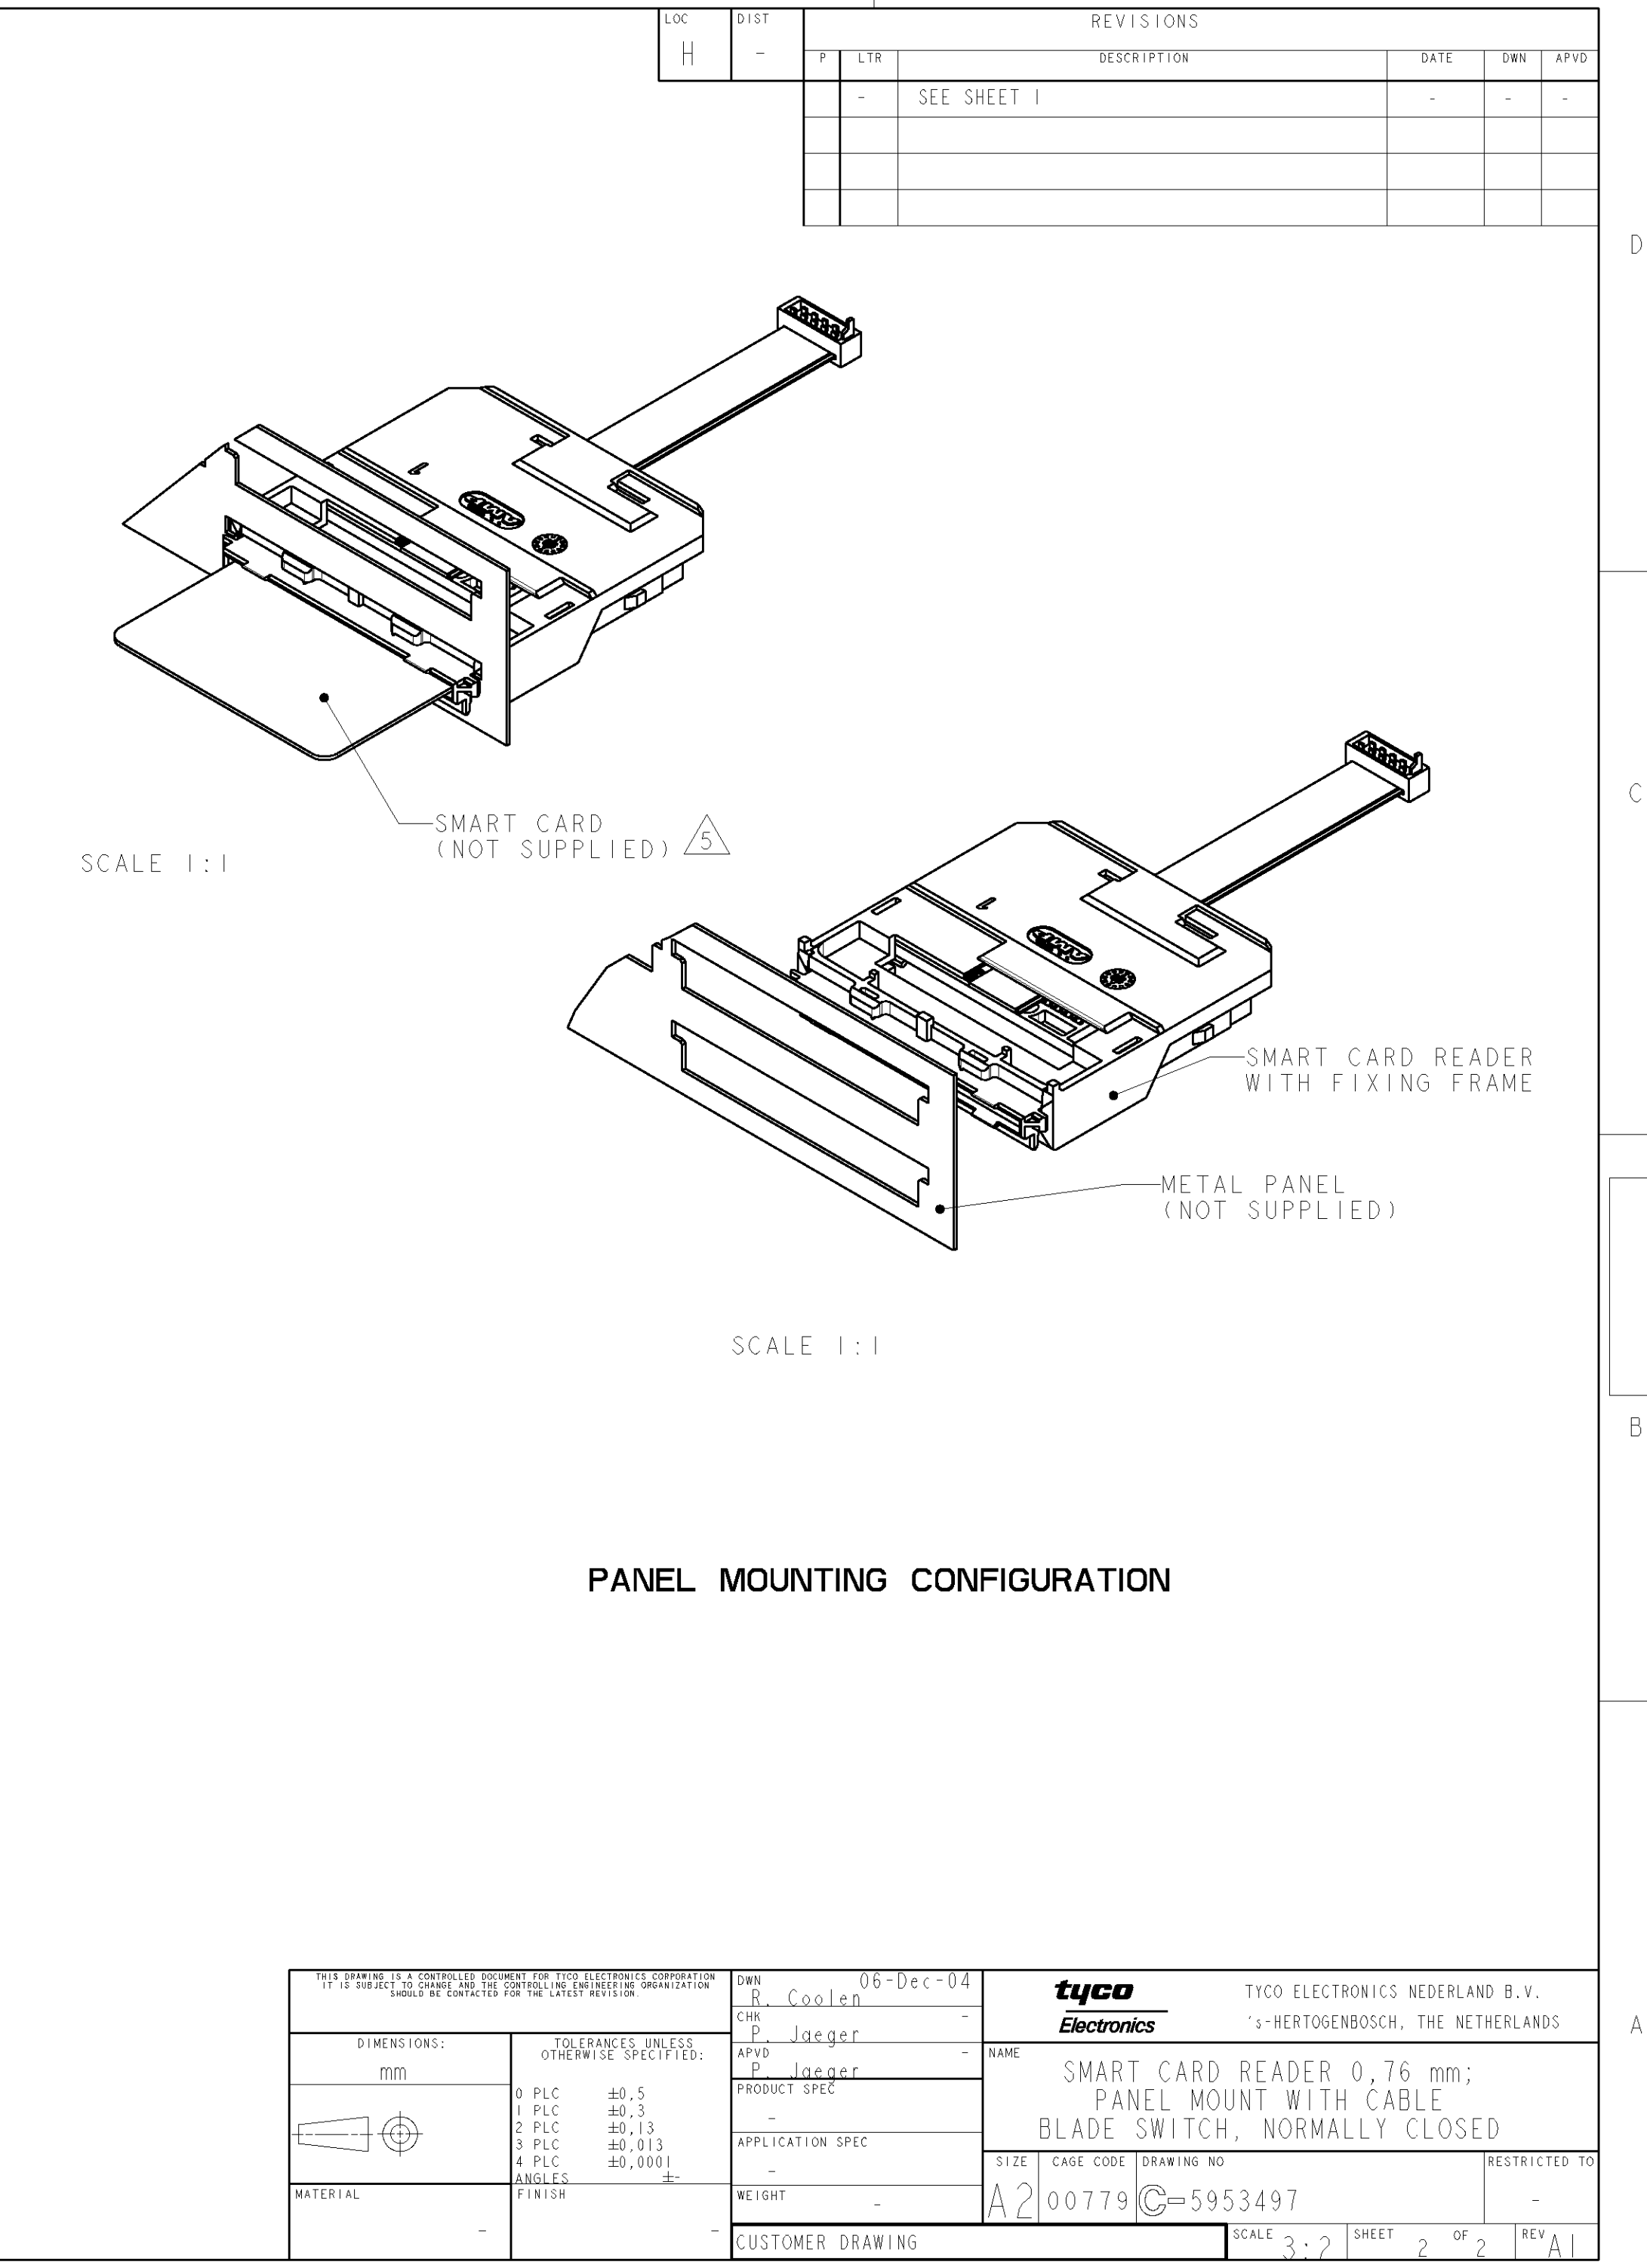


LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	EH10-0478-04	06DEC2004	RC	PJ
			A I	EH10-0156-05	02FEB2005	RC	PJ

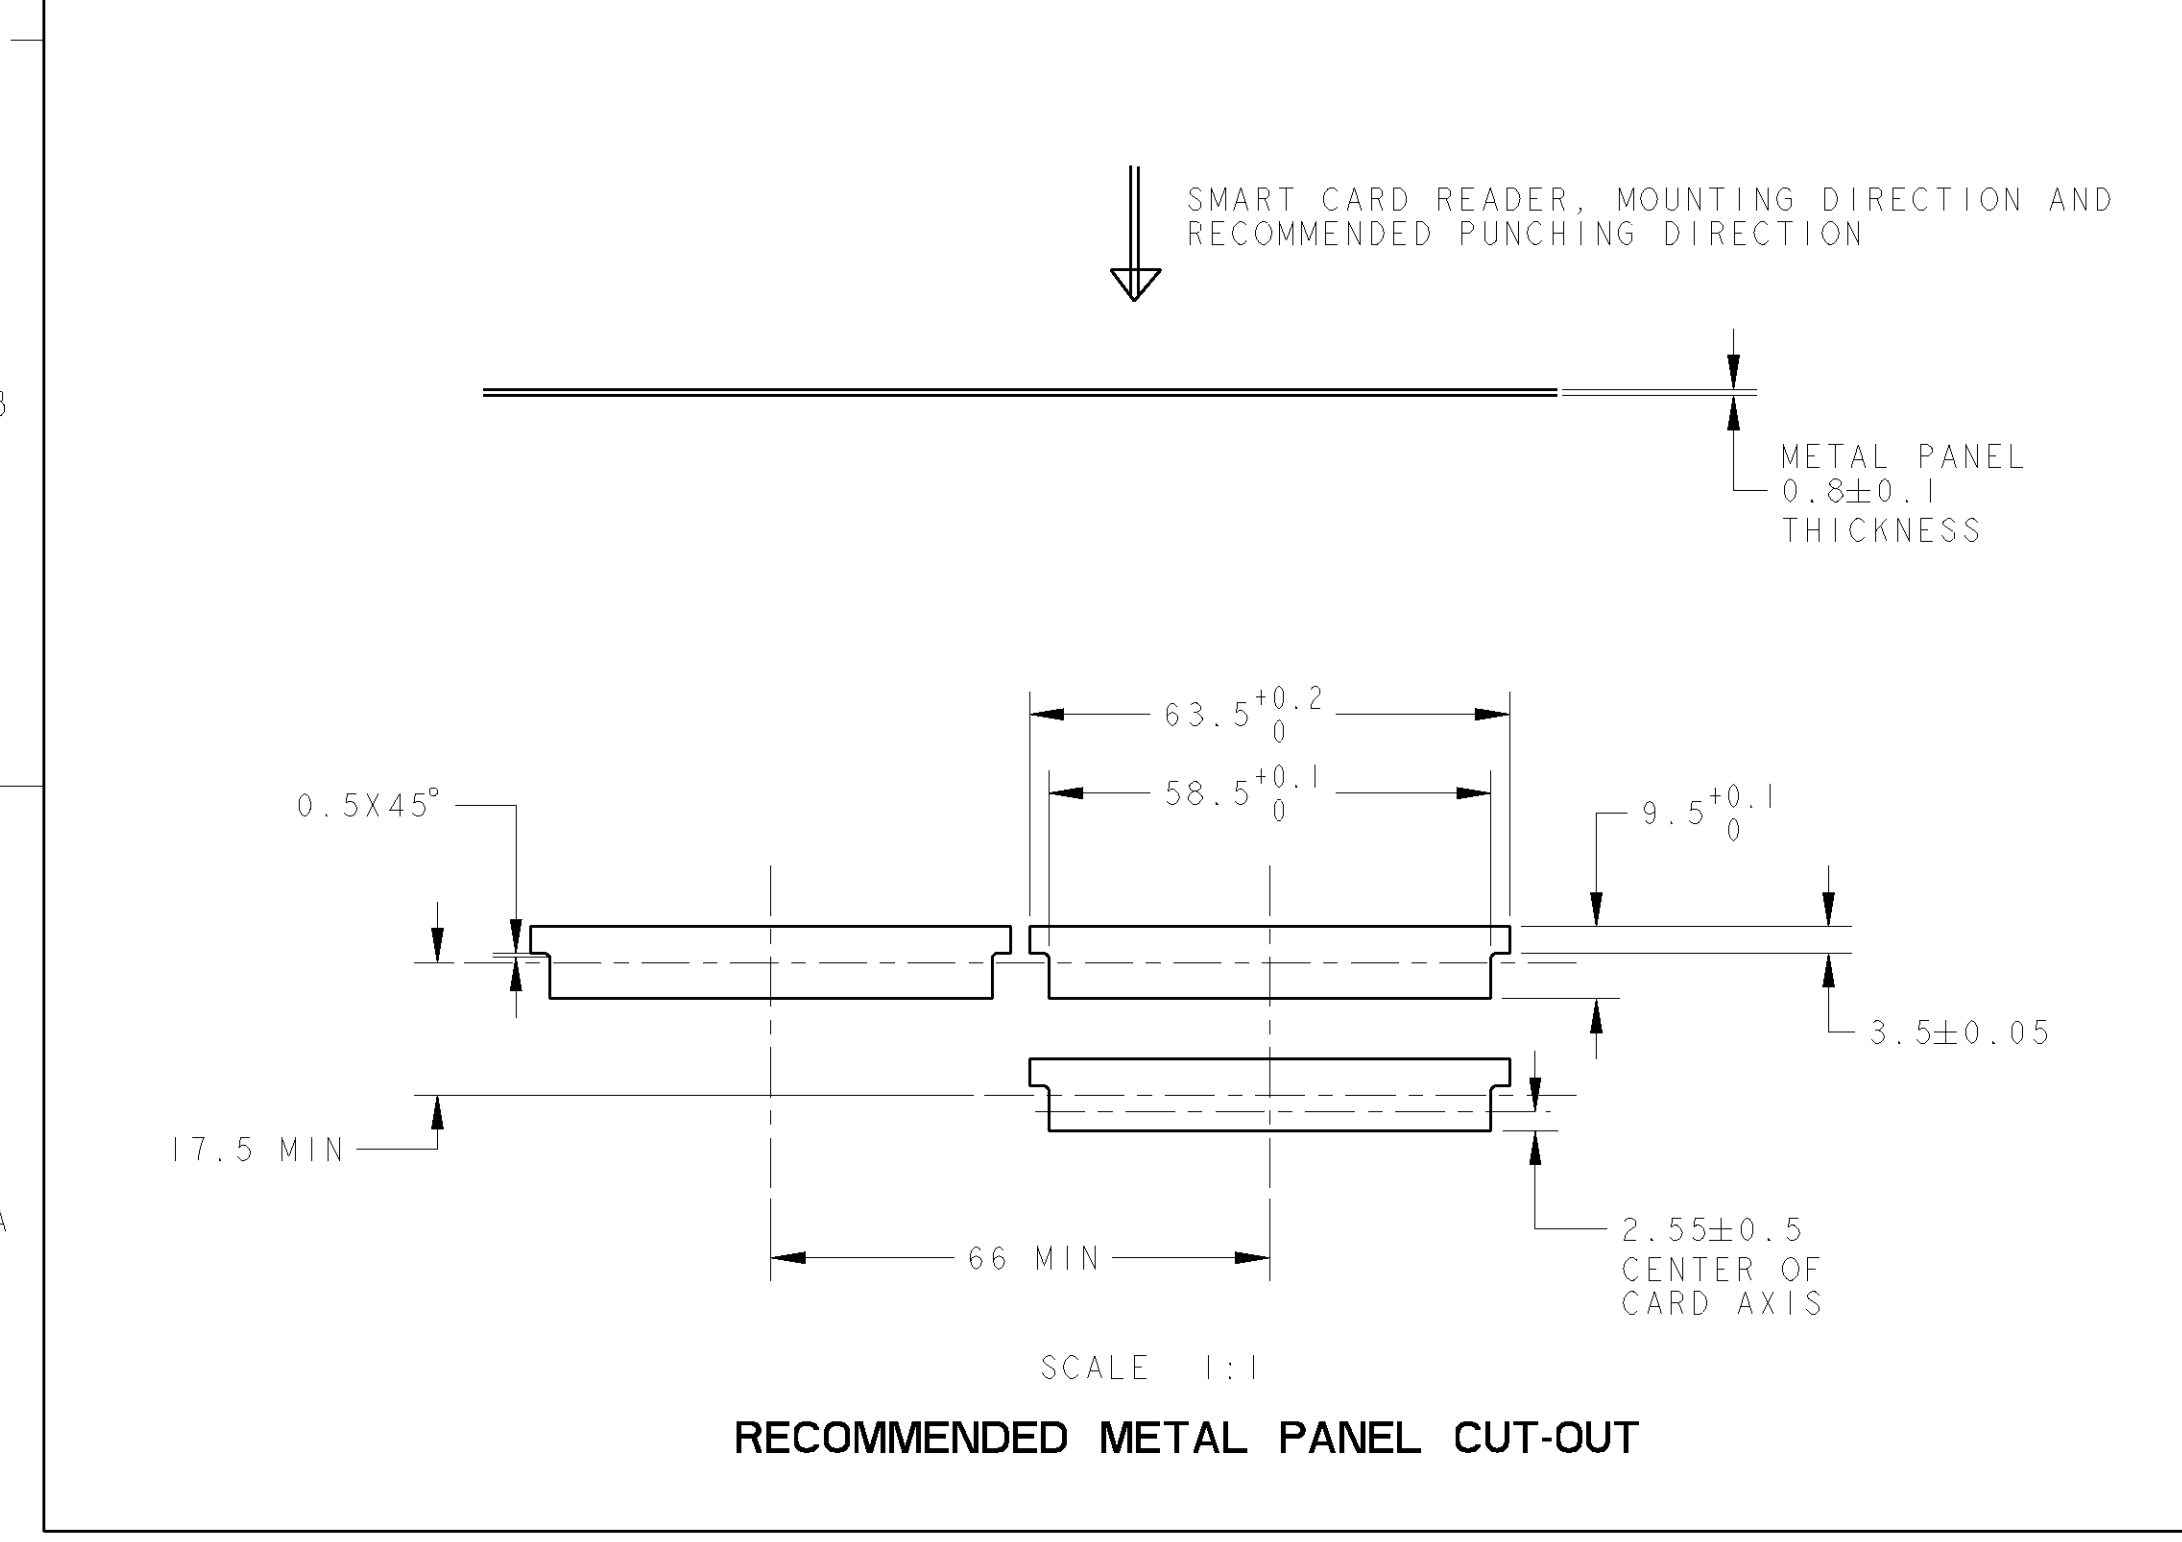

- 1 SMART CARD READER : PBT G-F, BLACK, UL 94V0
FIXING FRAME : ABS, BLACK, UL 94V0
SIGNAL AND SWITCH CONTACTS : PHOSPHOR BRONZE.
- 2 ALL CONTACTS : 0.00076 GOLD ON MATING AREAS,
0.0025 TIN (LEADFREE/MATTE) ON SOLDER TAILS,
ALL OVER 0.001 NICKEL.
- 3 AMP P/N'S ASS'Y :
- 5953497-1/-3/-5/-6/-8/-1--0 8 POSITIONS ISO 7816
- 5953497-2/-4/-7 16 POSITIONS ISO/CP8 AFNOR
- 4 UL STYLE 2651 RIBBON CABLE PVC AND,
10 POSITIONS MICRO-MATCH CONNECTOR;
TO BE MATED WITH
I-215079-0 THROUGH HOLE VERSION OR I-188275-0 SMT VERSION
- 5 AMP SMART CARD RECEPTACLE DESIGNED TO ACCEPT ISO 7810-7816 TYPE
INTEGRATED CIRCUIT SMART CARDS (0.76MM REF. THICKNESS)
SEE SHEET 2/2
- 6 CONNECTOR MEETS EMV REQUIREMENTS
-

	-	-			-	-	-	-	-	RIBBON CABLE ASS'Y, L = 70mm	3
	-	-	-	-		-	-	-	-	RIBBON CABLE ASS'Y, L = 130mm	3
	-	-	-	-	-		-	-	-	RIBBON CABLE ASS'Y, L = 140mm	3
			-	-	-	-		-	-	RIBBON CABLE ASS'Y, L = 100mm	3
	-	-	-	-	-	-	-			RIBBON CABLE ASS'Y, L = 60mm	3
			-			-		-		SMART CARD READER ASS'Y : 8 POS.	2
	-	-		-	-		-		-	SMART CARD READER ASS'Y : 16 POS.	2
										FIXING FRAME -2	1
ASS'Y P/N 5953497 	1-0	-8	-7	-6	-5	-4	-3	-2	-1	DESCRIPTION	ITEM
											

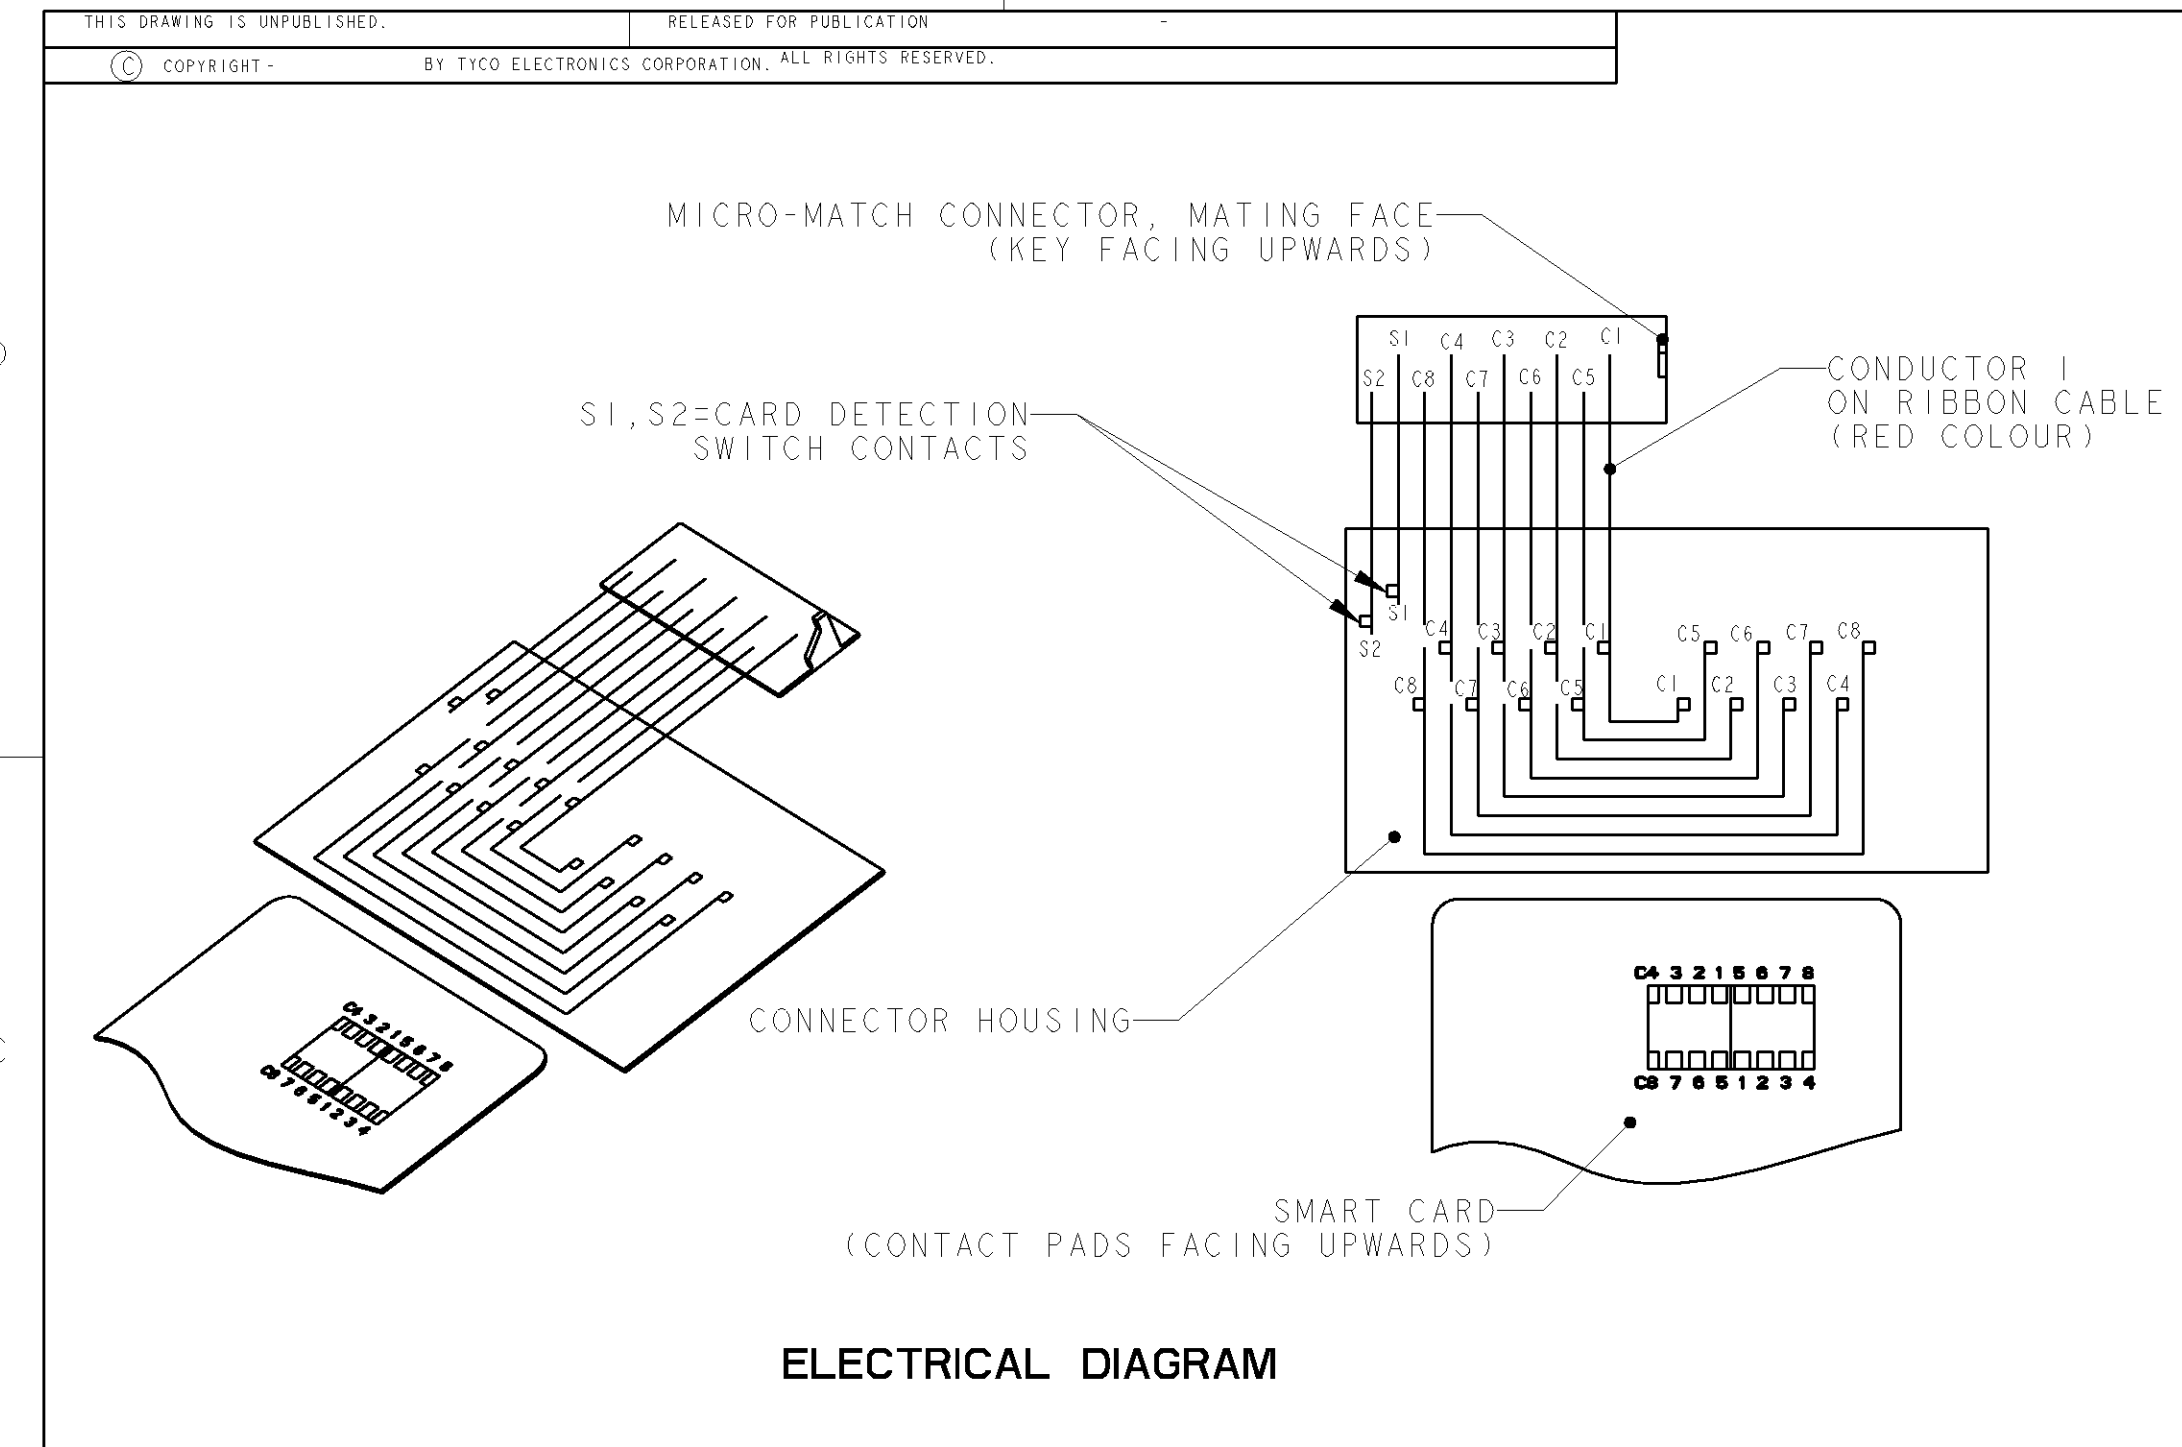

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION		DWN R. Coolen 06-Dec-04	tyco Electronics		TYCO ELECTRONICS NEDERLAND B.V. 's-HERTOGENBOSCH, THE NETHERLANDS		
DIMENSIONS: mm		CHK P. Jaeger	NAME				
		APVD P. Jaeger	SMART CARD READER 0,76 mm; PANEL MOUNT WITH CABLE BLADE SWITCH, NORMALLY CLOSED				
		PRODUCT SPEC -	SIZE A2				
		APPLICATION SPEC -					CAGE CODE 00779
		WEIGHT -					DRAWING NO C-5953497
MATERIAL -	FINISH -	CUSTOMER DRAWING		SCALE 3:2	SHEET 2 OF 2	REV A1	