
Product Details for 536366 -5

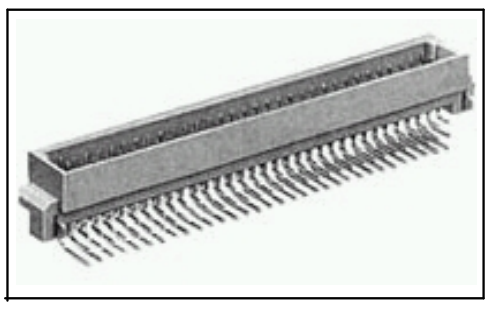

536366 -5

Active

Eurocard Type C

5 of 6 RoHS/ELV Compliant (Find RoHS Compliant Alternates/Compliance Statement)

Product Highlights:

- Type C Connectors
- Plug
- Number of Positions = 96
- Rows Loaded = A
- Rows Loaded = B

View all Features

Quick Links

Check Pricing & Availability
Search for Tooling
Product Feature Selector
Contact Us About This Product

Documentation & Additional Information

Product Drawings:

- PIN ASSEMBLY, EUROCARD, TYPE C WITH BOARD -LOCKS AND ... (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- Eurocard Connectors Types B,C,M,Q,R, & Enchanced Typ... (PDF, English)

Instruction Sheets:

- None Available

CAD Files:

- None Available

List all Documents

Additional Information:

- Product Line Information

Related Products:

- Tooling

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Type C Connectors
- Gender = Plug
- Number of Positions = 96
- Special PCB Retention = With
- Special PCB Retention Method = Boardlock
- PCB Mount Angle = Right Angle
- PCB Thickness (Minimum) (mm [in]) = 1.57 [0.062]
- Post Type = Solder Post
- Size = Standard
- Make First / Break Last = Yes
- Bus Type = FUTUREBUS, MULTIBUS (II), NUBUS, VMEbus, VXIBus
- DIN Level = II
- Mounting Ears = Without
- Toolless (Flat Rock) = No
- Color = Gray
- Comment = Contact Finish: DIN 41612 Class 2 In Contact Area. Tin - Lead On Posts.

Termination Related Features:

- Termination Post Length (mm [in]) = 2.65 [0.104]

Body Related Features:

- Rows Loaded = A, B, C
- Contact Cross Section (mm [in]) = 0.64 [.025] Sq.
- Make First/Break Last Contacts Loaded = Row B - None, Rows A, C - 1, 32

Contact Related Features:

- Contact Material = Brass

Housing Related Features:

- Housing Material = Glass -Filled Polyester

Industry Standards:

- RoHS/ELV Compliance = ELV compliant, 5 of 6 Compliant
- Lead Free Solder Processes = Wave solder capable to 240°C
- Flux - Tight Coating = Without

Conditions for Usage:

- Terminate To = Printed Circuit Board
- High Temperature Housing = No

Other:

- Brand = AMP

© 2006 Tyco Electronics Corporation All Rights Reserved