


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-12-015840	07AUG2012	DLD	CJS
	C	REVISED PER ECO-14-018647	11DEC2014	DLD	CJS
	C1	REVISED PER ECO-15-001841	04FEB2015	DLD	CJS

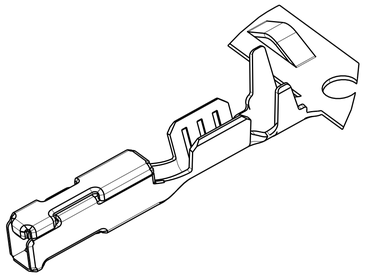


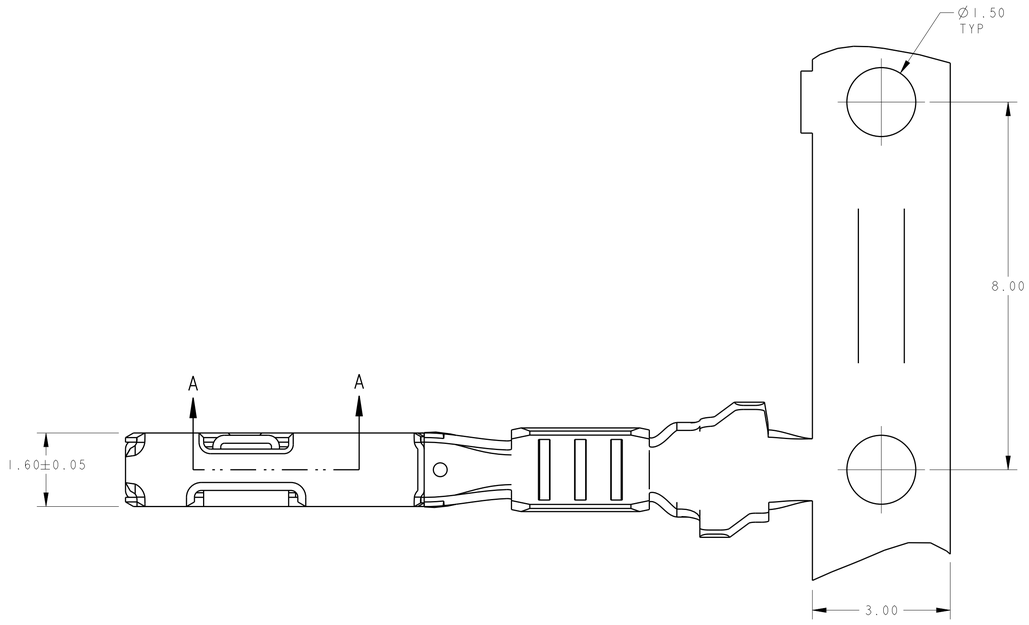


1. MATERIAL: COPPER ALLOY
2. FINISH: PRE-PLATED WITH SILVER FLASH OVERALL WITH 1.00-3.00µm SILVER IN SEPARABLE CONTACT AREA ALL OVER NICKEL.
3. MATERIAL ID FEATURE IN "UP" POSITION.
4. NORMAL FORCE 240 GRAMS REFERENCE.
5. AVERAGE ENGAGEMENT FORCE TARGET 3.0N REF.
6. TERMINAL HAS NYE LUBRICANTS NYETACT 561J-50-AG PERFORMANCE LUBE/GREASE APPLIED. THIS IS A WHITISH COLORED LUBE. AMOUNT AND VISIBILITY MAY VARY.
7. FOR SILVER PLATING: ELECTRICAL PERFORMANCE IS NOT AFFECTED BY GRAY OR BLACK TARNISH ON THE SILVER PLATING SURFACE. ACCEPTABLE SILVER SURFACE CAN INCLUDE GRAY OR BLACK TARNISH.
8. FINISH: PRE-PLATED WITH SELECT SILVER AND TIN ALL OVER NICKEL. SEPARABLE CONTACT INTERFACE AREA: 1.00-3.00µm SILVER. CRIMP AREA: 1.00µm MIN TIN.
9. PENDING OBSOLESCENCE
10. NOT RELEASED FOR PRODUCTION. PENDING PPAP APPROVALS.



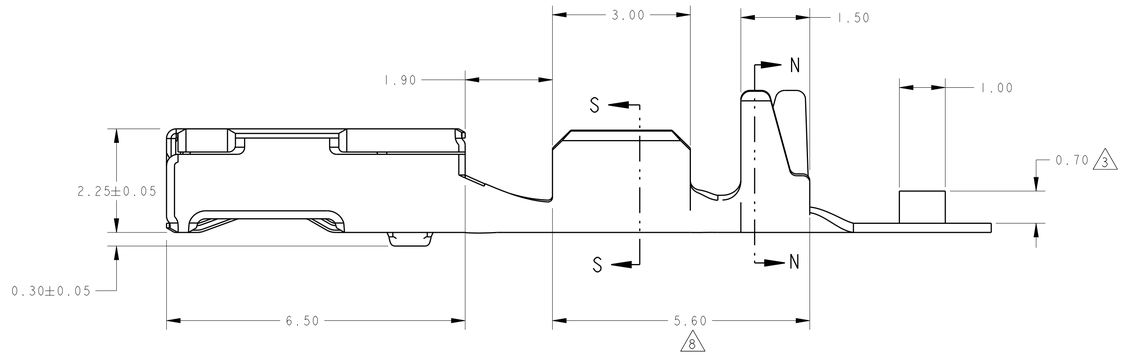




SECTION S-S




SECTION N-N

8	DETAIL B	1.40	2.40	0.80	1.85	1.10-1.40	0.35	22	1-1456968-8 10
8	DETAIL B	0.85	1.82	0.65	1.50	0.85-1.05	0.13	26	1-1456968-7 10
8	DETAIL A	1.40	2.40	0.80	1.85	1.10-1.40	0.35	22	1-1456968-6 10
8	DETAIL A	0.85	1.82	0.65	1.50	0.85-1.05	0.13	26	1-1456968-5 10
8	DETAIL B	1.78	2.94	1.00	1.96	1.60-2.06	0.75	18	1-1456968-4 10
8	DETAIL B	1.78	2.94	0.80	1.82	1.50-1.85	0.35-0.50	20-22	1-1456968-3 10
8	DETAIL A	1.78	2.94	1.00	1.96	1.60-2.06	0.75	18	1-1456968-2 10
8	DETAIL A	1.78	2.94	0.80	1.82	1.50-1.85	0.35-0.50	20-22	1-1456968-1 10
2	DETAIL B	1.40	2.40	0.80	1.85	1.10-1.40	0.35	22	1456968-8 9
2	DETAIL B	0.85	1.82	0.65	1.50	0.85-1.05	0.13	26	1456968-7 9
2	DETAIL A	1.40	2.40	0.80	1.85	1.10-1.40	0.35	22	1456968-6 9
2	DETAIL A	0.85	1.82	0.65	1.50	0.85-1.05	0.13	26	1456968-5 9
2	DETAIL B	1.78	2.94	1.00	1.96	1.60-2.06	0.75	18	1456968-4 9
2	DETAIL B	1.78	2.94	0.80	1.82	1.50-1.85	0.35-0.50	20-22	1456968-3 9
2	DETAIL A	1.78	2.94	1.00	1.96	1.60-2.06	0.75	18	1456968-2 9
2	DETAIL A	1.78	2.94	0.80	1.82	1.50-1.85	0.35-0.50	20-22	1456968-1 9
FINISH	REELING	M	L	K	J	INSULATION DIA	WIRE SIZE mm²	WIRE SIZE AWG	PART NUMBER




DETAIL A
SCALE 2:1

REELING DIRECTION REQUIRED FOR TE APPLICATORS



DETAIL B
SCALE 2:1

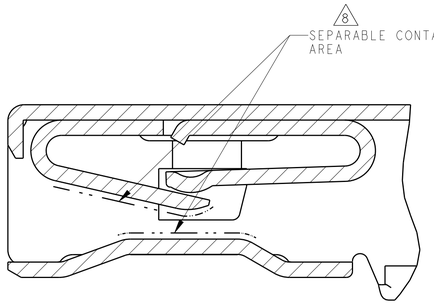

SECTION A-A
SCALE 25:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.15
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - 1
FINISH -

DWN F. KINSEY 16APR2007
CHK C. SCHMID 16APR2007
APVD C. SCHMID 16APR2007
PRODUCT SPEC -
APPLICATION SPEC 114-13183
WEIGHT 0.23g
CUSTOMER DRAWING

TE Connectivity

NAME CONTACT, FEMALE, 0.64, SILVER PLATE GENERATION Y

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-1456968 | RESTRICTED TO -

SCALE 15:1 | SHEET 1 OF 1 | REV C1

4805 (3/13)