

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
G	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECO-13-009685	11JUN13	KH	DR

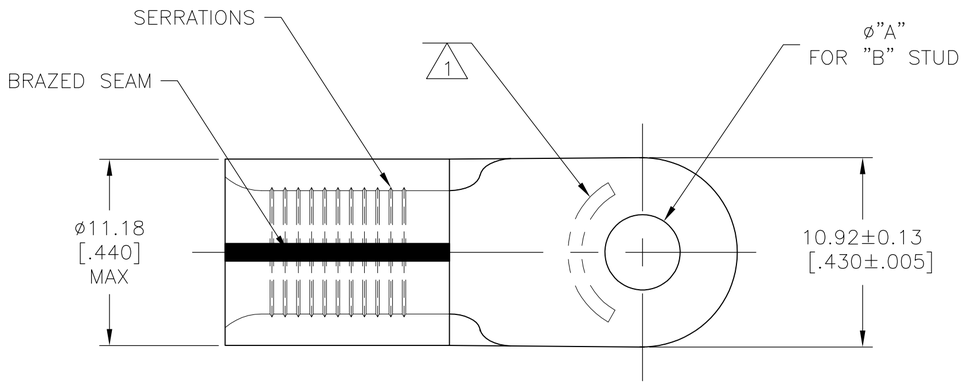

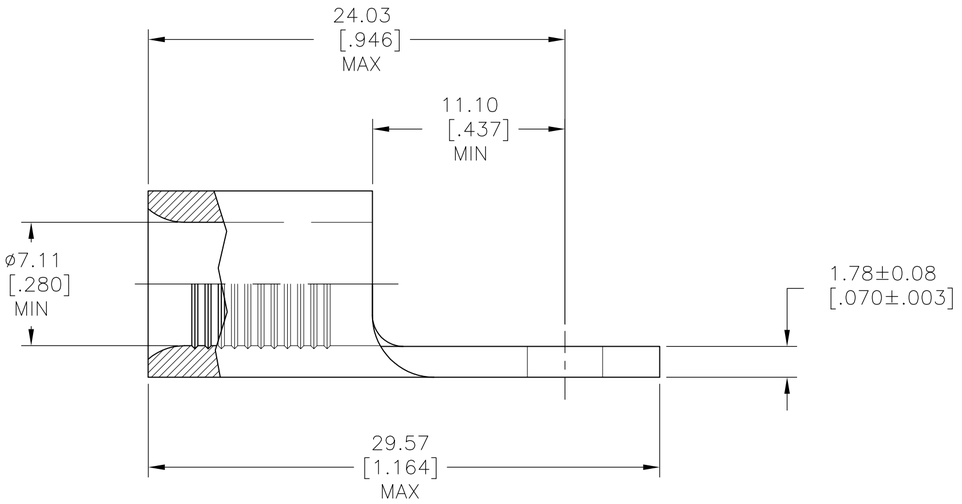

1. STAMP AMP 4W* APPROX AS SHOWN
2. GOLD PLATE 0.00127[.000050] MIN EXT THK PER ASTM B488, TYPE I, CODE C, OVER NICKEL PLATE 0.00127[.000050] MIN EXT THK PER SAE, AMS QQ-N-290 OVER COPPER FLASH PER SAE AMS 2418

AMP WIRE RANGE
4 AWG SOLID OR STRANDED

QTY	PACKAGE TYPE	"A" DIA	"B" STUD	PART NUMBER
100	LOOSE PIECE	4.34±0.08[.171±.003]	M4[#8]	1958439-2
100	LOOSE PIECE	3.68±0.08[.145±.003]	M3.5[#6]	1958439-1

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 260°[500°F]
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 16.8-26.7mm² [33,100-52,600] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL: COPPER PER ASTM B-152 ANNEALED

FINISH: 2

DWN	KIRAN HOLAL	08DEC12
CHK	ROHDE DANIEL	08DEC12
APVD	ROHDE DANIEL	08DEC12
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: TERMINAL, RING TONGUE, STRATO-THERM

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1958439	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV A

1958439

1471-9 (3/11)