

4



3

2


1

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION - , - .
© COPYRIGHT - By -	ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECO-18-006777	02MAY2018	RS	DR

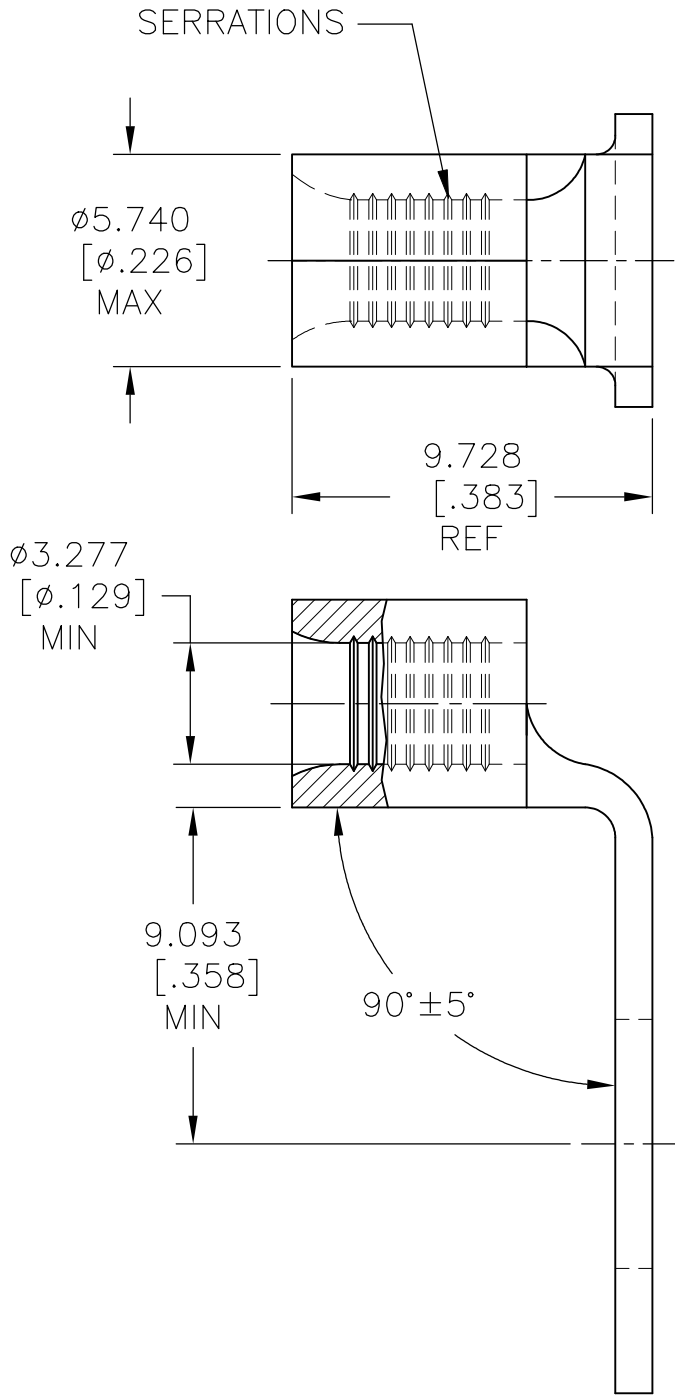

- 1 STAMP AMP 12-10* APPROX AS SHOWN
- 2 NICKEL PLATE 0.00762[.000300] MIN EXT. THK. PER SAE AMS QQ-N-290
- 3 MATERIAL THK: 0.991±0.051 [.039±.002]

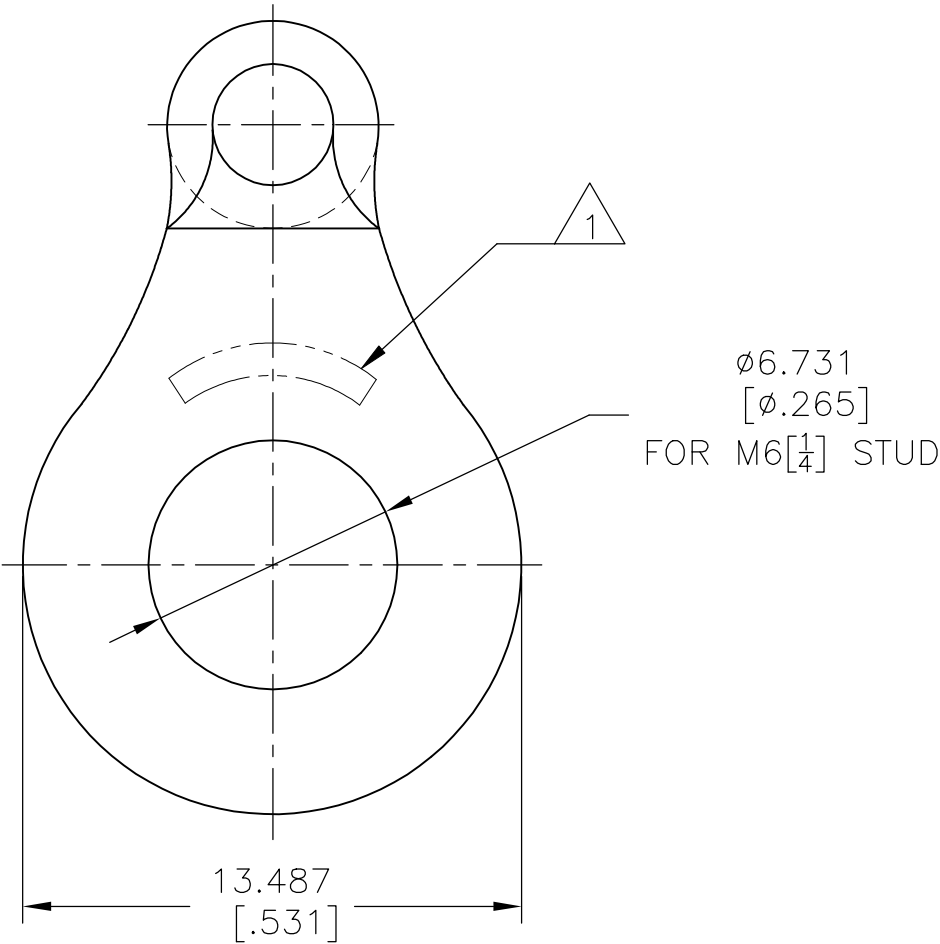

500	LOOSE PIECE	1958543-1
QTY	PACKAGE TYPE	PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 343°C [649°F] MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm² [5,180-13,100] CIR MILLS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVI S 08AUG2017	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK ROHDE DANIEL F. 08AUG2017			
		APVD ROHDE DANIEL F. 08AUG2017	NAME TERMINAL, RING TONGUE, 12-10 AWG, 1/4 STUD, STRATO-THERM, HR, BEND 90 DEG		
		PRODUCT SPEC	—		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	—		
MATERIAL COPPER PER ASTM-B-152 ANNEALED		WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C-1958543
FINISH 2		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1	REV A