


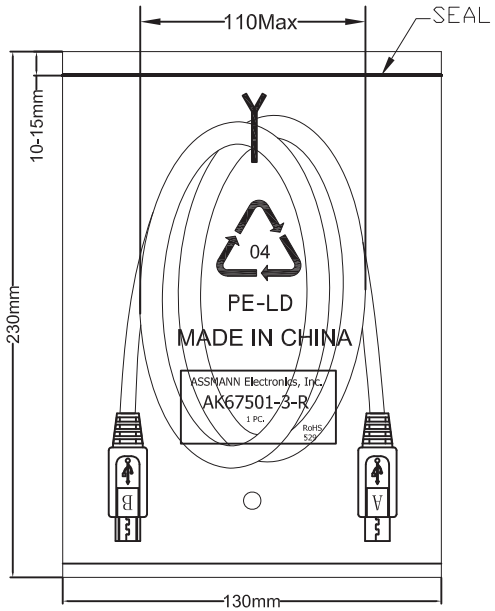


1PC/PE BAG

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL:)*1P+ 28AWG(7/0.12TC)*2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
- P1 Connector: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- P2 Connector: Micro USB 5P A/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- Outer Jacket: Black PVC-40P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 10MΩ Min.
- Dielectric test: 300V DC

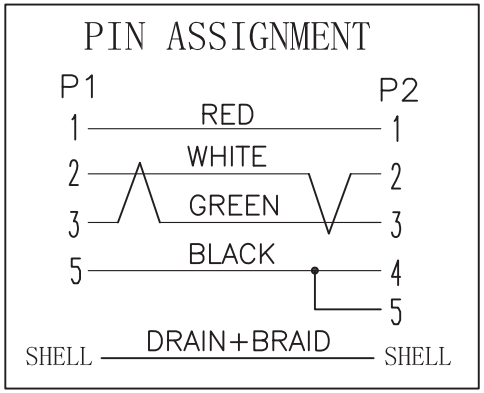

Unit: mm

RoHS Compliant

Scale	Free
TOLERANCE	
X.	±0.3
X.X	±X
X.XX	±X
DIM	TOL
X.°	±X°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name
①	Updated information	16.09.13	Wilson

	Date	Name
Drawn	19.10.13	Chappell
Approved		

ASSMANN WSW components
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title
USB 2.0 Micro Connection cable
A type Male ↔ B type Male, 3 Meters

ASSMANN WSW-No.
AK67501-3-R

Drawing-No.

rev01

Replace

Sheet 1/1