


RFSSMAA2JCCAFEC Datasheet



Product Name // SSMA Straight Jack 2 Hole Flange RF Connector

[View Product Page](#)

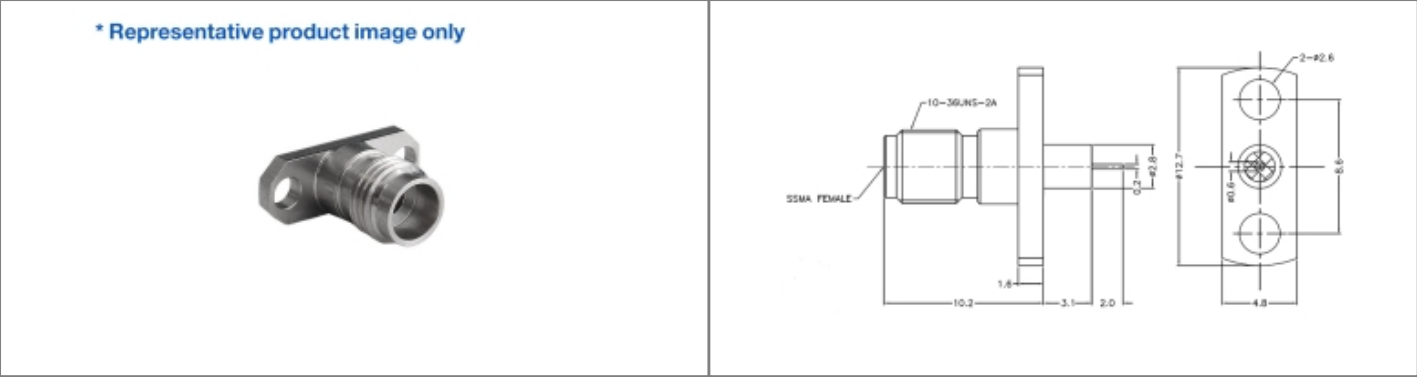

// Product Description:	
- SSMA Straight Jack 2 Hole Flange RF Connector - Maximum Voltage: 335V - Temperature range: -65°C to +165°C - Frecuency range: 0GHz - 40GHz - VSWR: <1.30	- Dielectric withstanding Voltage: >500V - Impedance: 50Ohm - Body Material: Stainless Steel Passivation - Contact Material: Beryllium Copper

// General Information:	
Product Display Title:	SSMA Series Pin with Extended PTFE 2 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	SSMA Series
Body Length:	10.20mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>500V
Durability:	>500 cycles
Flange Mount Length:	12.70mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Mount Hole Distance:	8.60mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	40GHz
Pin Diameter:	0.30mm
Pin Length:	2.00mm
Ptfe Diameter:	2.80mm
Ptfe Length:	3.10mm
Thread Size:	10 36UNS 2A
Voltage Max:	335V
Vswr:	<1.30

// Product PDF Links

[SSMA Series Product Datasheet](#)

// Product 3D CAD Model Links

[RFSSMAA2JCCAFEC3D CAD Model](#)