

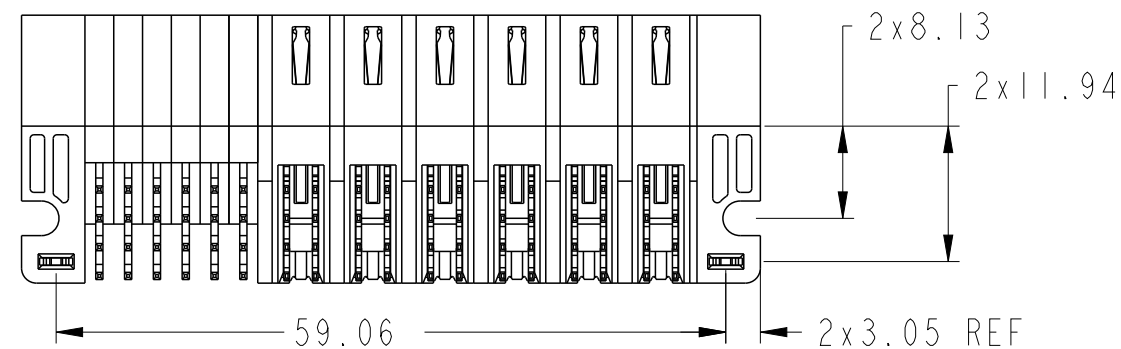
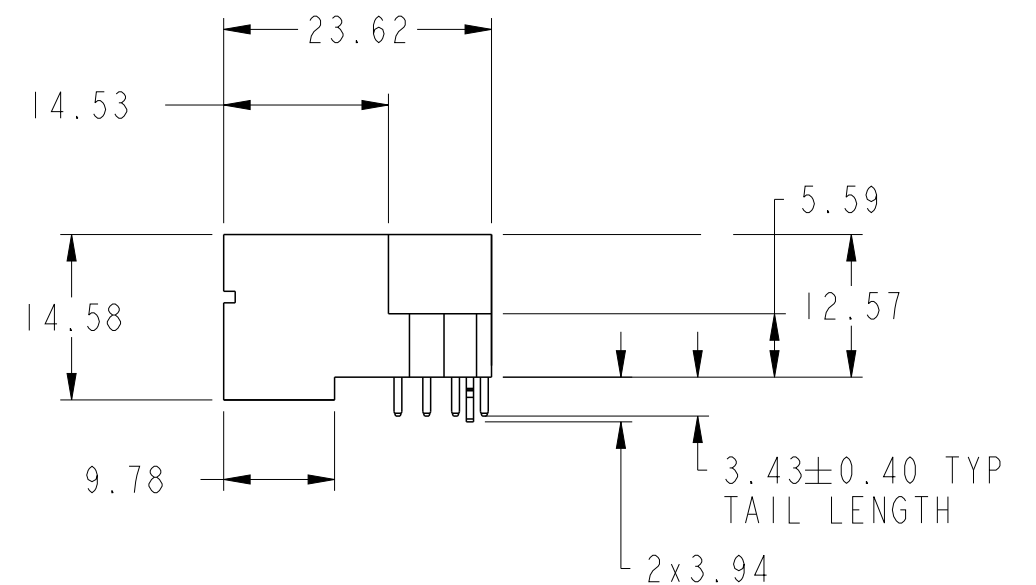


PRODUCT NUMBER SEE SHEET 2

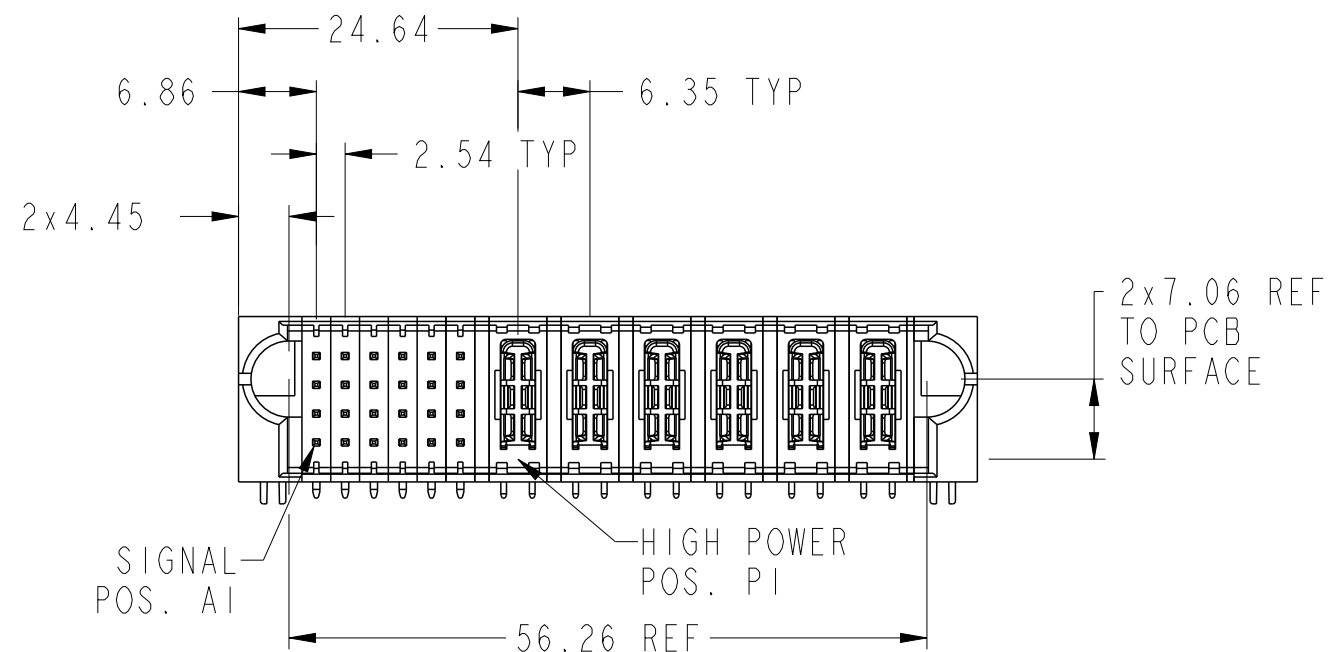

|                        |              |           |                |                  |                |             |            |          |       |     |
|------------------------|--------------|-----------|----------------|------------------|----------------|-------------|------------|----------|-------|-----|
| spec ref               | *            | dr        | Vicking Liu    | 2015/10/13       | projection     | MM          | size       | A3       | scale | 3:2 |
| tolerance std          | ASME Y14.5   | eng       | Vicking Liu    | 2015/11/22       | chr            | Fancy Zhang | 2015/11/22 | ecn no   | -     |     |
| surface                | ✓            | appr      | Pei-Ming Zheng | 2015/11/22       | product family | PwrBlade+   | rel level  | Released |       |     |
| linear                 | 0.X          | ±0.5      | 0.XX           | ±0.25            | 0.XXX          | ±0.10       | angular    | 0°       | ±2°   |     |
| ASME Y14.5             |              |           |                |                  |                |             |            |          |       |     |
| www.fci.com            | cat. no.     | 24S + 6HP | RA STB HEADER  | 10106124-6006009 | rev            | A           |            |          |       |     |
| Product - Customer Drw | sheet 1 of 3 |           |                |                  |                |             |            |          |       |     |

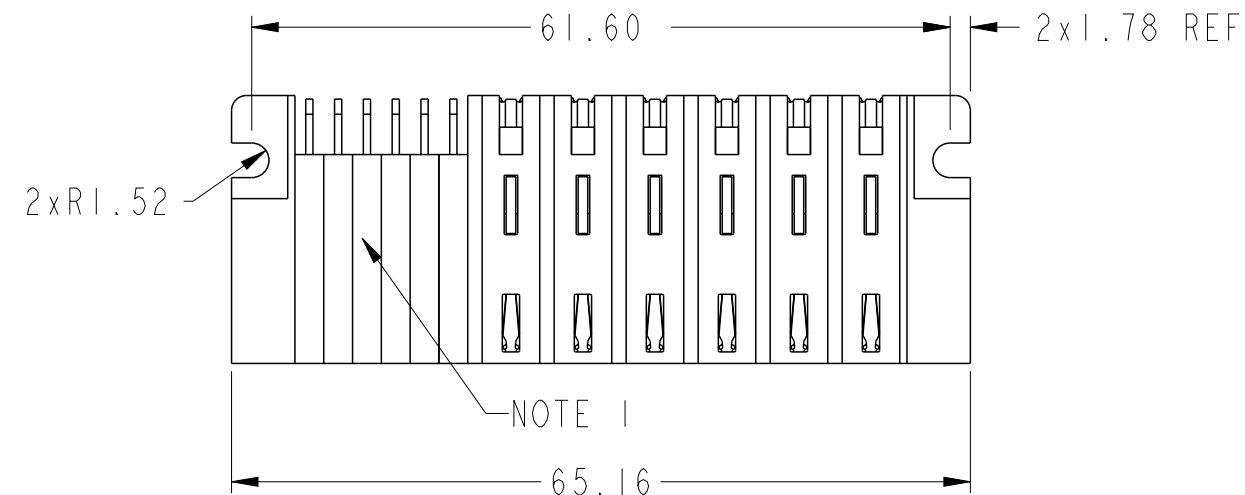


Copyright FCI.

| CODE | DESCRIPTION                       |
|------|-----------------------------------|
| E    | MLBF SIGNAL CONTACT, ROW A (3.43) |
| F    | MLBF SIGNAL CONTACT, ROW B (3.43) |
| G    | MLBF SIGNAL CONTACT, ROW C (3.43) |
| H1   | STD HIGH POWER CONTACT (3.43)     |
| HA   | METAL HOLD DOWN                   |
| U    | STD SIGNAL CONTACT, ROW D (3.43)  |

|                |                |            |                                   |                           |                        |          |        |                  |              |   |
|----------------|----------------|------------|-----------------------------------|---------------------------|------------------------|----------|--------|------------------|--------------|---|
| dr             | Vicking Liu    | 2015/10/13 | <div>projection</div> <div></div> | <div>MM</div> <div></div> | size                   | A3       | scale  | 3:2              |              |   |
| eng            | Vicking Liu    | 2015/11/22 |                                   |                           | ecn no                 | -        |        |                  |              |   |
| chr            | Fancy Zhang    | 2015/11/22 |                                   |                           |                        |          |        |                  |              |   |
| appr           | Pei-Ming Zheng | 2015/11/22 | product family                    | PwrBlade+                 | rel level              | Released |        |                  |              |   |
| <div>FCi</div> |                |            | title                             |                           | 24S + 6HP              |          | dwg no | 10106124-6006009 | rev          | A |
|                |                |            | RA STB HEADER                     |                           |                        |          |        |                  |              |   |
| www.fci.com    |                |            | cat. no.                          |                           | Product - Customer Drw |          |        |                  | sheet 2 of 3 |   |

| CODE | DESCRIPTION                       |
|------|-----------------------------------|
| E    | MLBF SIGNAL CONTACT, ROW A (3.43) |
| F    | MLBF SIGNAL CONTACT, ROW B (3.43) |
| G    | MLBF SIGNAL CONTACT, ROW C (3.43) |
| H1   | STD HIGH POWER CONTACT (3.43)     |
| HA   | METAL HOLD DOWN                   |
| U    | STD SIGNAL CONTACT, ROW D (3.43)  |

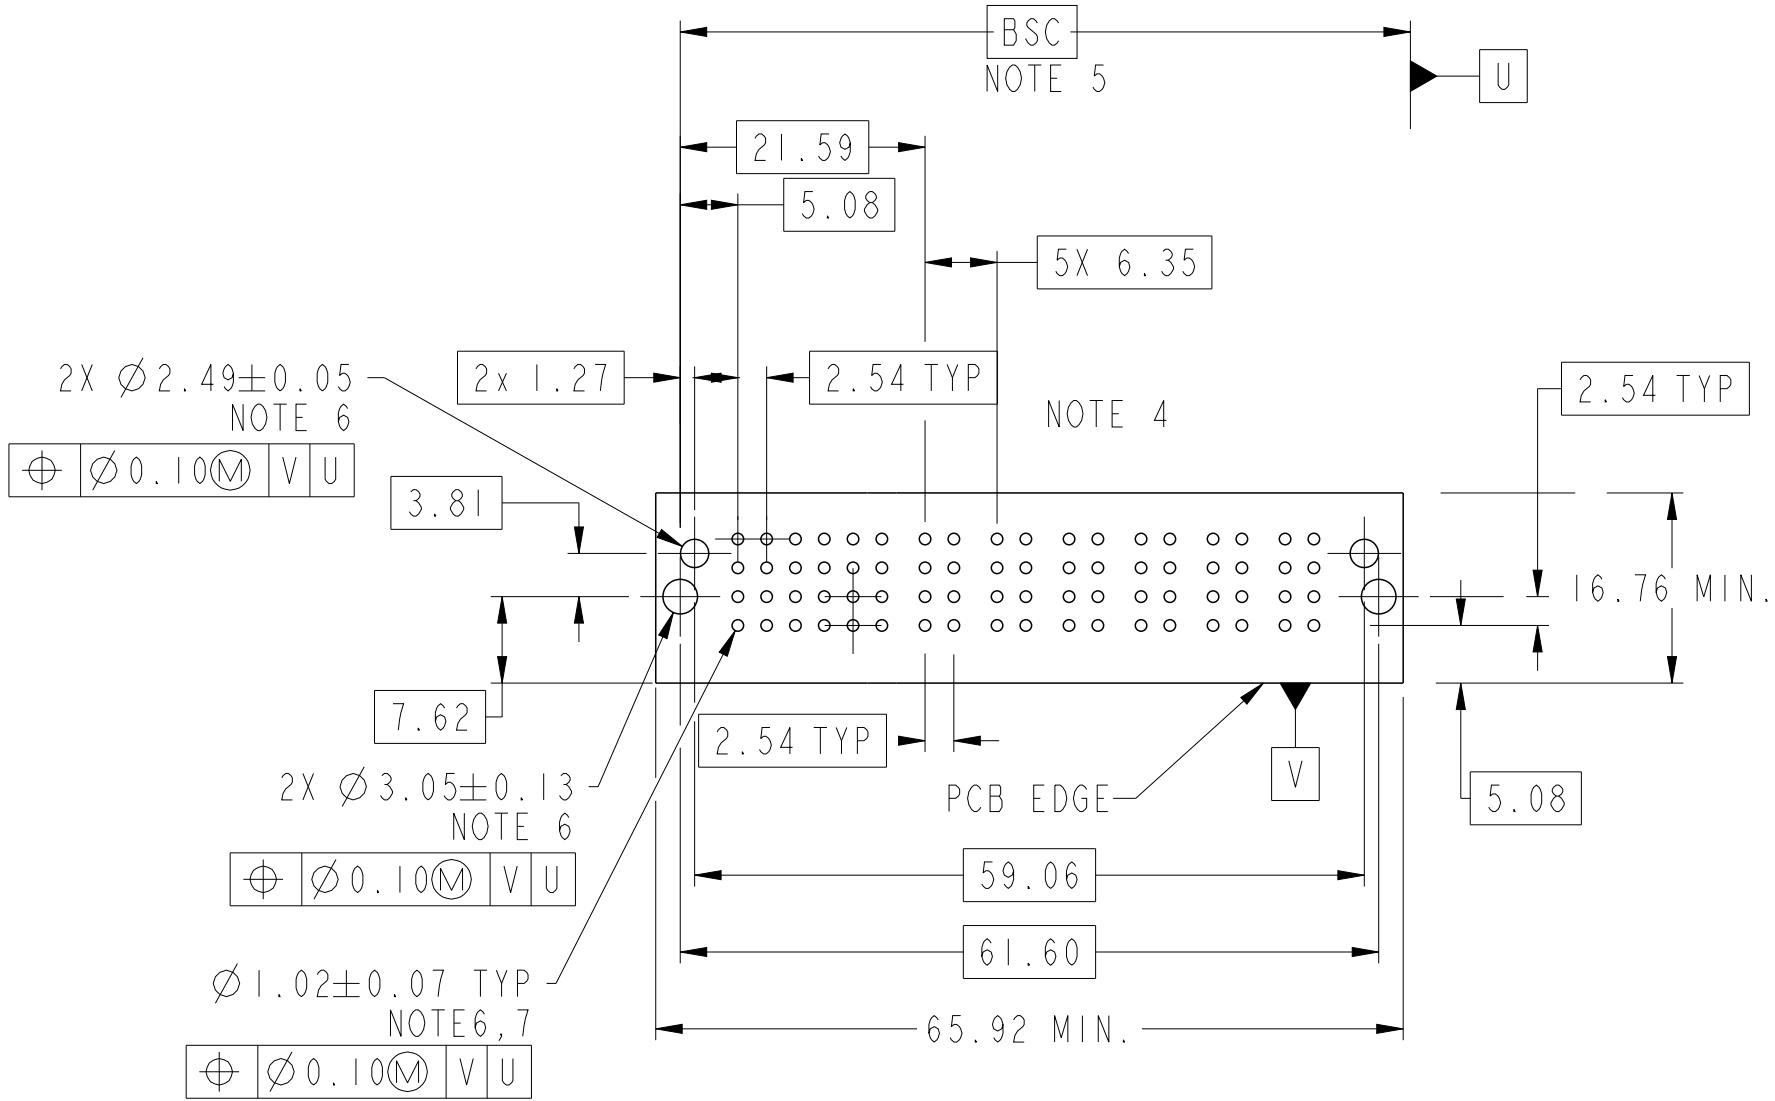

| PRODUCT NO.        | ROWS             | SIGNAL                                                                            |   |   |   |   |   | HIGH POWER |    |    |    |    |    |    |                                                                                     |
|--------------------|------------------|-----------------------------------------------------------------------------------|---|---|---|---|---|------------|----|----|----|----|----|----|-------------------------------------------------------------------------------------|
|                    |                  | E1                                                                                | 1 | 2 | 3 | 4 | 5 | 6          | P1 | P2 | P3 | P4 | P5 | P6 | E2                                                                                  |
| 10106124-6006009LF | D<br>C<br>B<br>A |  | U | U | U | U | U | U          | H1 | H1 | H1 | H1 | H1 | H1 |  |
|                    |                  |  | G | G | G | G | G | G          |    |    |    |    |    |    |  |
|                    |                  |  | F | F | F | F | F | F          |    |    |    |    |    |    |  |
|                    |                  |  | E | E | E | E | E | E          |    |    |    |    |    |    |  |
|                    |                  |                                                                                   |   |   |   |   |   |            |    |    |    |    |    |    |                                                                                     |

A

B

C

D

A

B

C

D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.  
APPLICATION SPECIFICATION: GS-20-141.  
PRODUCT PACKAGED IN TRAYS: GS-14-1502.



Copyright FCI.

|             |                |            |                                   |                           |                        |                  |       |              |
|-------------|----------------|------------|-----------------------------------|---------------------------|------------------------|------------------|-------|--------------|
| dr          | Vicking Liu    | 2015/10/13 | <div>projection</div> <div></div> | <div>MM</div> <div></div> | size                   | A3               | scale | 3:2          |
| eng         | Vicking Liu    | 2015/11/22 |                                   |                           | ecn no                 | -                |       |              |
| chr         | Fancy Zhang    | 2015/11/22 |                                   |                           | rel level              | Released         |       |              |
| appr        | Pei-Ming Zheng | 2015/11/22 | product family                    |                           | PwrBlade+              |                  |       |              |
| <div></div> |                |            | title                             |                           |                        | 24S + 6HP        |       | rev          |
|             |                |            | RA STB HEADER                     |                           |                        | dwg no           |       |              |
|             |                |            |                                   |                           |                        | 10106124-6006009 |       | A            |
| www.fci.com |                |            | cat. no.                          |                           | Product - Customer Drw |                  |       | sheet 3 of 3 |