

Adapter - HC-B-TA-M25-PLR-BK - 1414244

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Adapter, plastic, for EVO housing, M25 thread

RoHS

Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 021973
GTIN	4055626021973
Weight per Piece (excluding packing)	20.000 g
Custom tariff number	85389099
Country of origin	Poland

Technical data

Dimensions

Length of internal thread	10 mm
---------------------------	-------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C
---------------------------------	-------------------

General

Material	PA
Housing material	PA
Thread type on connection side	Bayonet B plastic
Thread type on seal side	M25
Torque	8 Nm (Tightening torque of screw connection to be screwed in)
Flammability rating according to UL 94	V0

Adapter - HC-B-TA-M25-PLR-BK - 1414244

Technical data

General

Assembly instructions	Bayonet locking max. 3x can be removed
-----------------------	--

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

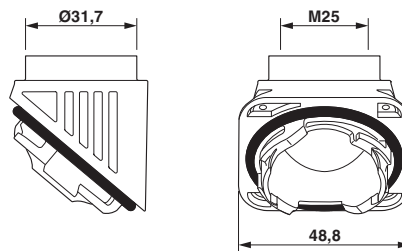

Dimensional drawing

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27261207
eCl@ss 8.0	27440209
eCl@ss 9.0	27440209

ETIM

ETIM 5.0	EC002635
ETIM 6.0	EC002635

UNSPSC

UNSPSC 13.2	39121408
-------------	----------

Approvals

Approvals

Adapter - HC-B-TA-M25-PLR-BK - 1414244

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		7500651.22.01.00246
-----	---	---------------------
