

## Front connection module - ME PLC 40 CT36 GY7035 - 2201494

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Connection technology carrier, fully assembled with FKCN 2x 18-pos., cover and release lever, incl. fitted cover, corresponding header: 1x CCDN 2,5/18-G1 P26 THR (1734436)

### Your advantages

- ✔ Item is from the ME PLC product range
- ✔ Tool-free mounting
- ✔ Available in 40 mm overall width
- ✔ Inflammability class V0 according to UL 94
- ✔ Variety of connection technologies
- ✔ Can be mounted on the DIN rail
- ✔ Optional with bus connector for DIN rail mounting



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 046356 838627
GTIN	4046356838627
Weight per Piece (excluding packing)	116.000 g
Custom tariff number	85366990
Country of origin	Germany

### Technical data

#### Item properties

Brief article description	Front connection module
Type	ME PLC 40 CT36 GY7035

## Front connection module - ME PLC 40 CT36 GY7035 - 2201494

### Technical data

#### Item properties

Order No.	2201494
Housing type	DIN rail housing
Type	Set consisting of upper housing part and connection technology
Max. IP code to attain	IP20
Mounting type	Latching with lower housing part
Ventilation openings present	no
Max. number of positions	36 (pitch: 5 mm)

#### Dimensions

Width [ w ]	39.7 mm
Height [ h ]	128 mm
Depth [ d ]	44.4 mm

#### Material data

Color (RAL)	light gray (7035)
Flammability rating according to UL 94	V0
Housing material	Polycarbonate

#### Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C ... 105 °C (depending on power dissipation)
Relative humidity (storage/transport)	95 %

#### PCB data

Mounting position	Vertical (horizontal DIN rail)
-------------------	--------------------------------

#### General information

Type of note	Assembly instruction:
Note	Refer to the data sheet for the range in the download area.

#### Packaging information

Type of packaging	packed in cardboard
Pieces per package	10
Denomination packing units	Pcs.
Outer packaging type	Carton

#### Standards and regulations

Flammability rating according to UL 94	V0
--	----

#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
------------	---

# Front connection module - ME PLC 40 CT36 GY7035 - 2201494


Technical data

Environmental Product Compliance

	No hazardous substances above threshold values
--	--

Drawings

Dimensional drawing

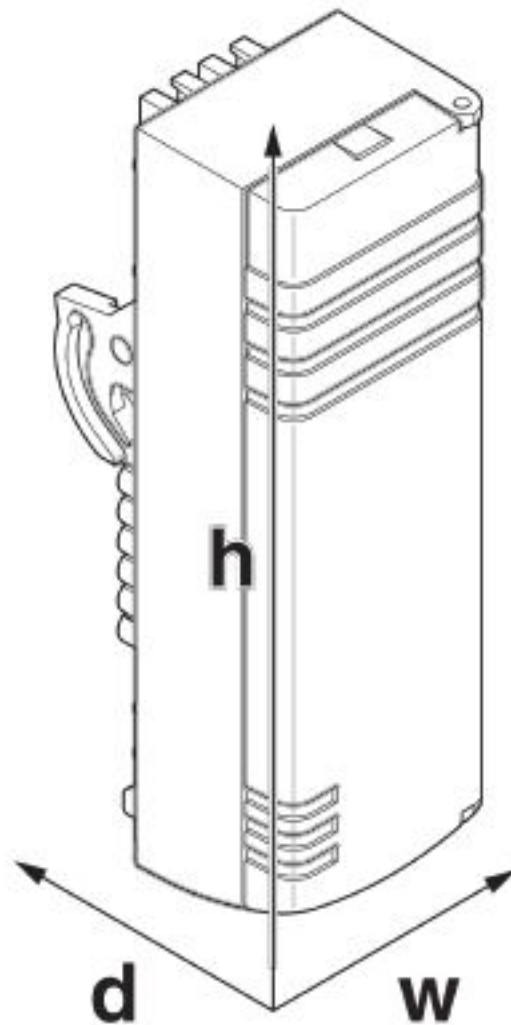

Classifications

eCl@ss

eCl@ss 10.0.1	27182702
---------------	----------

## Front connection module - ME PLC 40 CT36 GY7035 - 2201494

### Classifications

#### eCl@ss

eCl@ss 4.0	27180400
eCl@ss 4.1	27180400
eCl@ss 5.0	27180500
eCl@ss 5.1	27180500
eCl@ss 6.0	27180800
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

#### ETIM

ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031
ETIM 6.0	EC001031
ETIM 7.0	EC001031

#### UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

### Approvals

#### Approvals

---

Approvals

EAC

---

Ex Approvals

---

#### Approval details

## Front connection module - ME PLC 40 CT36 GY7035 - 2201494

### Approvals

EAC



B.01742