
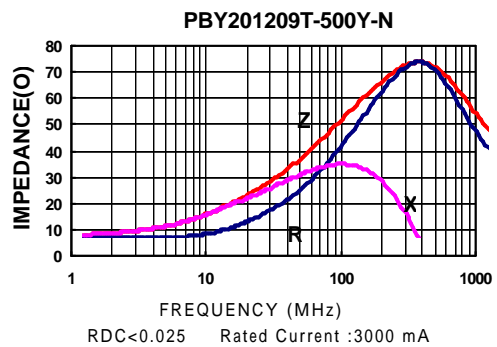
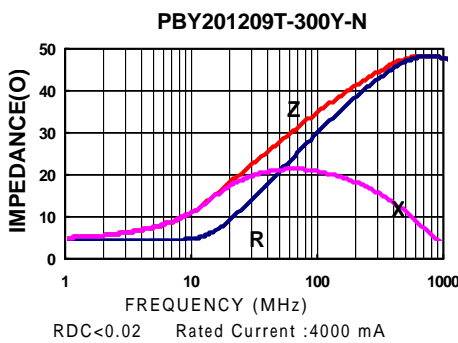
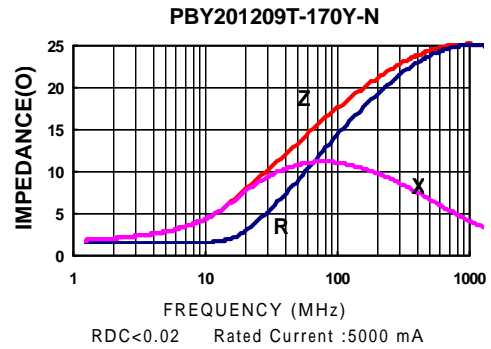


## Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ( ±25%)	D.C. Resistance ( ) Max	Rated current (mA) Max
PBY201209T-070Y-N	100	7	0.01	6000
PBY201209T-110Y-N	100	11	0.01	6000
PBY201209T-170Y-N	100	17	0.02	5000
PBY201209T-300Y-N	100	30	0.015	4000
PBY201209T-500Y-N	100	50	0.025	3000
PBY201209T-600Y-N	100	60	0.03	3000
PBY201209T-800Y-N	100	80	0.04	3000
PBY201209T-121Y-N	100	120	0.04	3000
PBY201209T-201Y-N	100	200	0.05	2500
PBY201209T-301Y-N	100	300	0.08	2000
PBY201209T-401Y-N	100	400	0.10	2000
PBY201209T-751Y-N	100	750	0.12	1500
PBY201209T-601Y-N	100	600	0.10	2000
PBY201209T-102Y-N	100	1000	0.12	1500
PBY201209T-152Y-N	100	1500	0.30	1000

Test Instruments : HP4291A Impedance / Material Analyzer

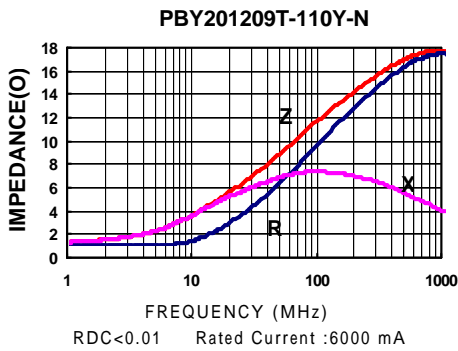

# SMD Multilayer Ferrite Chip Beads – PB201209 Series

Test Instruments : HP4291A Impedance / Material Analyzer

