


108961-000 Product Details

[Live Product Chat](#)

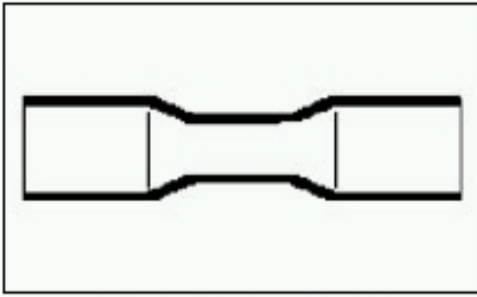

108961-000

TE Part Number: 108961-000

Active

[Add to Part List](#)

Splices - Closed Barrel

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Splice
- Sealed
- Splice Type = Butt
- Butt Splice Type = Standard
- Body Style = DuraSeal

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)
- ▶ [Request Samples](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [DuraSeal Crimp Splice Environment Resistant \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- [Wire and Cable, Harnessing and Protection Products \(PDF, English\)](#)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Splice
- [Sealed](#) = Yes
- [Splice Type](#) = Butt
- Body Style = DuraSeal
- [Insulation](#) = Yes
- [Insulation Support](#) = Insulation Support
- [Insulation Diameter \(mm \[in\]\)](#) = 6.50 [.256] Max.
- [Material](#) = Copper
- [Finish](#) = Tin
- Color = Yellow
- Connection Type = Crimp
- Comment = Heat-Shrinkable

Mechanical Attachment:

- Inside Diameter (mm [in]) = 3.50 [1.470]

Electrical Characteristics:

- Voltage Rating (VAC) = 600

Body Related Features:

- [Butt Splice Type](#) = Standard
- [Wire Range \(mm \[AWG\]\)](#) = 3.00-6.00² [12-10]
- [Wire Range \(CMA\)](#) = 5,874 – 9,354
- Insulation Type = Pre-Insulated
- Insulation Sleeve Material = Heat-Shrinkable Nylon
- Heat Shrinkable Insulation Material = Nylon

Industry Standards:

- Government/Industry Qualification = No
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Operating Temperature (Max.) (°C) = 125

Operation/Application:

- Application Type = Wire to wire splicing

Packaging Related Features:

- [Packaging Method](#) = Loose Piece

Other:

- Brand = Raychem