



Wire Protection & Management > Adhesives & Sealants > Epoxy Adhesives



Packaging Method: **Roll**
Packaging Quantity: **1**
Heat Resistance Temperature (Max): **200 °C**

Features

Body Features

Color (Supplied)	Black
Color (Cured)	Black
Material Systems Code	300

Usage Conditions

Heat Resistance Temperature (Max)	200 °C
-----------------------------------	--------

Packaging Features

Packaging Method	Roll
Packaging Quantity	1

Other

Curing Method	150 °C for 50 min
---------------	-------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241)



Does not contain REACH SVHC

Halogen Content	Out of Scope - excluded from Halogen requirements
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

 TE Part # 821026-000 562A032-12-0	 TE Part # 576709-000 462A034-12-30-0	 TE Part # CB7878-000 202E334-780-0	 TE Part # 977289-000 322A158-12-0
 TE Part # 811231-000 214A011-12-0	 TE Part # 088923-000 202W232-12-0	 TE Part # CAT-R21-73106549 Bulbous Heat Shrink Boots: Lipped, Right Angle	 TE Part # CAT-R21-7310723 Low Profile Heat Shrink Boots: Poly Molded, Lipped, Straight
 TE Part # 821029-000 342A124-12-0	 TE Part # CAT-R21-731 Heat Shrink Boots: Non Lipped, Straight	 TE Part # 307569-000 202W302-12-0	 TE Part # 342759-000 202W312-12-0







TE Part # 811024-000
[202A021-12-0](#)

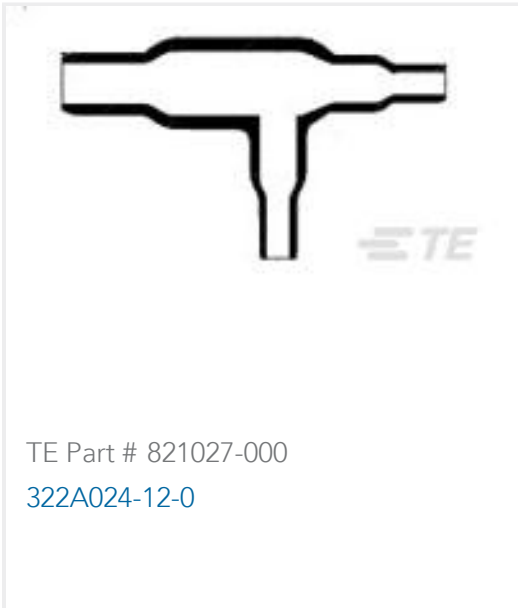

TE Part # 821027-000
[322A024-12-0](#)

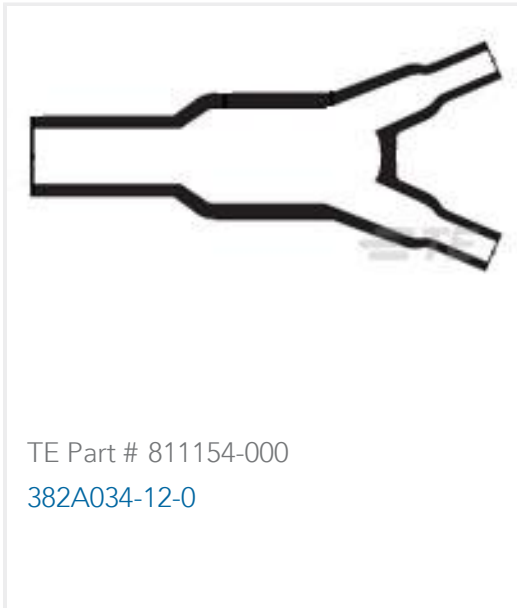

TE Part # 811154-000
[382A034-12-0](#)

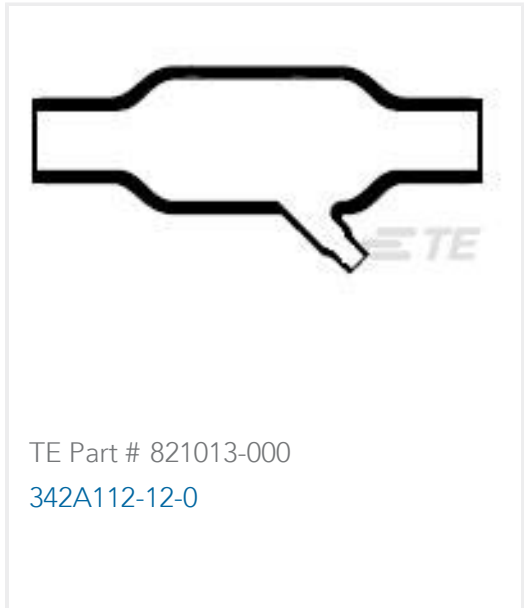

TE Part # 821013-000
[342A112-12-0](#)




TE Part # 811288-000
[202A222-12-0](#)



TE Part # 811352-000
[101A021-12-0](#)



TE Part # 740221-000
[101A062-12-0](#)

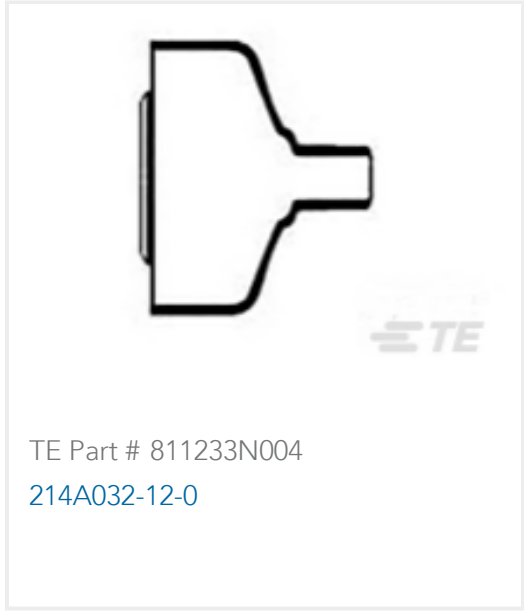

TE Part # 811233N004
[214A032-12-0](#)

Customers Also Bought




TE Part #262555-000
[264W012-12-0](#)



TE Part #CAT-R21-7310723
[Low Profile Heat Shrink Boots: Poly Molded, Lipped, Straight](#)



TE Part #1384453002
[RAY-103-20.0\(50\)](#)

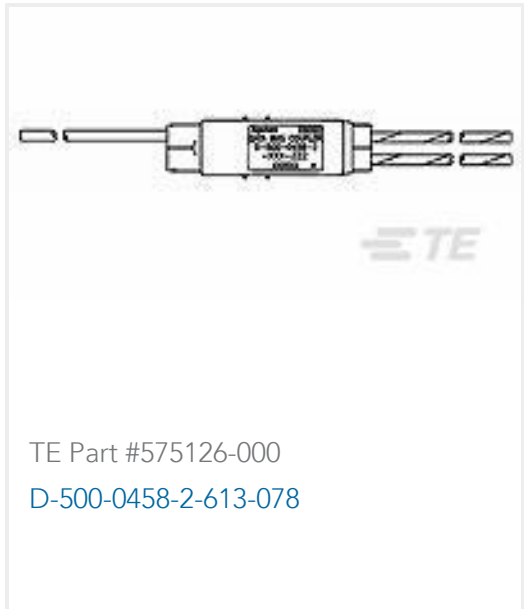

TE Part #575126-000
[D-500-0458-2-613-078](#)



TE Part #3693074002
[RT555-1/2-0-SP](#)




TE Part #814715-000
[222A121-3/42-0](#)



TE Part #1-1617069-0
[DS9-1W=DS9 DIP SOLID STATE RELAY](#)



TE Part #1618278-1
[KC-11=RELAY, VACUUM, SPDT](#)

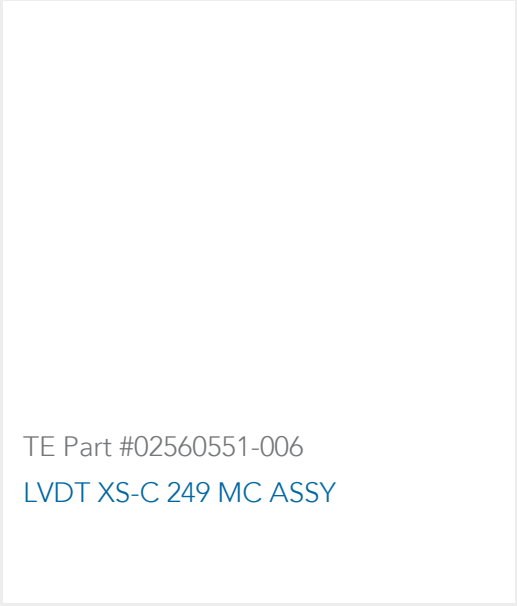

TE Part #02560551-006
[LVDT XS-C 249 MC ASSY](#)

Documents



Product Drawings

S1255-04-3/4X100FT

English

Datasheets & Catalog Pages

Adhesives Selection Guide

English

Product Specifications

Thermofit Adhesive S-1255-04 Flex Fluid Resistant, High Temperature, One Part-Flexible Epoxy

English