

**SAI-M23-SE-L-6****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

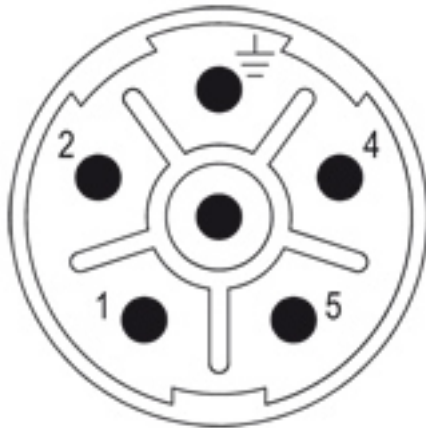**Pinning**

The M23 round plug-in connectors offer a high number of mating cycles, high current-carrying capacity and high contact-density coupled with minimum dimensions. Enclosures, inserts and crimp contacts need to be ordered separately.

**General ordering data**

Type	SAI-M23-SE-L-6
Order No.	<a href="#">1170350000</a>
Version	Sensor/Actuator plug-in connector, Insert
GTIN (EAN)	4032248962303
Qty.	1 pc(s).

**Data sheet**

**SAI-M23-SE-L-6**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Dimensions and weights**

Net weight 8 g

**Temperatures**

Operating temperature, max. 125 °C      Operating temperature, min. -40 °C

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**Standards**

Certificate No. (UR) E344862

**General data**

Coding	none	Conductor O.D.	-
Connection thread	M23	Contact number / diameter	6 x 2 mm
Design	Male	Fire behaviour	V-0
Housing main material	Thermoplastic polyamide PA 6, PBT	Insulation strength	> 10 <sup>13</sup> Ω
Number of poles	6	Plugging cycles	> 1000
Rated current	2 mm contact= 28 A	Rated voltage (text)	2 mm contact= 600 V
Type of connection	Crimp connection		

**Classifications**

ETIM 6.0	EC000438	ETIM 7.0	EC000438
eClass 9.1	27-44-02-05	eClass 10.0	27-44-02-23

**Product information**

Product information Enclosures, inserts and crimp contacts need to be ordered separately.

**Approvals**

Approvals



ROHS Conform

**Downloads**


Brochure/Catalogue [CAT 8 SAI 15/16 EN](#)  
[FL FIELDWIRING EN](#)

**SAI-M23-SE-L-6**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Dimensioned drawing**

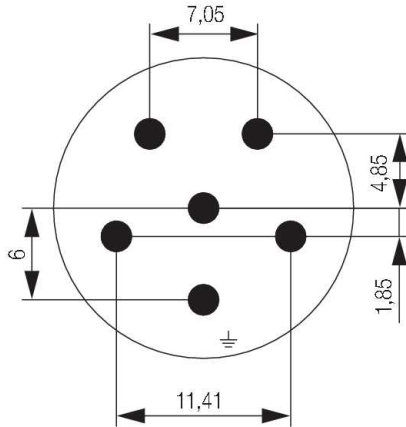

**Technical data**

No. of poles	5 + PE	4/4	
Number of contacts	6	4	4
Contact-ø	mm 2	1	2

6 times male, 2 mm