REVISIONS			
REV.	DESCRIPTION	DATE	BY
1	ORIGINAL	DRAWN DATE	
2	SPECIFICATIONS ADDED/MODIFIED	7/3/2025	V.K.

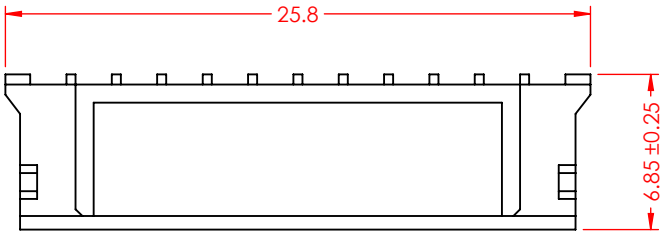

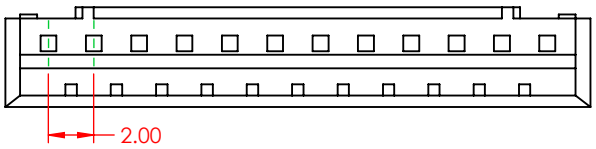



SPECIFICATIONS

VOLTAGE RATING:	100V AC/DC
WITHSTANDING VOLTAGE:	800V AC / 60s
2 TEMPERATURE RATING:	-40°C to 105°C
INSULATOR RESISTANCE:	1000MΩ MIN
INSULATOR MATERIAL:	PA66, UL94V-0

MATES WITH

2 TOP ENTRY KINKED	140-512-415-001
2 TOP ENTRY STRAIGHT	140-512-415-101
2 TOP ENTRY SMT	140-512-417-011
2 SIDE ENTRY KINKED	140-512-415-000
2 SIDE ENTRY STRAIGHT	140-512-415-100
2 SIDE ENTRY SMT	140-512-417-060

EDAC

RoHS COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC, AND SHALL NOT BE REPRODUCED , OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN BY	C.B.
DRAWN DATE	04/03/2020
CHECKED BY	R.S.M.
CHECK DATE	04/06/2020
TOLERANCES .X	±0.25
TOLERANCES .XX	±0.13
TOLERANCES .XXX	±0.05
ALL DIMENSIONS AND TOLERANCES IN MM	

140 SERIES HOUSING, 2.00 PITCH

PART NUMBER	140-512-210-011		
MATERIAL		SIZE	A
NOTES:		REVISION	2
SCALE	3:1	SHEET	1 OF 1