

SHOP BY CATEGORY

All Categories SEARCH

All Products

[Home](#) > [All Products](#) > [40 Series- Audio-Video Switchers, & Distribution Amplifiers](#) > HDMI to 1 x 2 HDMI Splitter With Audio Extractor (Digital SPDIF Optical-Toslink + Analog L/R)

3D Products

Model: 40-HDMI-EXT | HDMI to 1 x 2 HDMI Splitter With Audio Extractor (Digital SPDIF Optical-Toslink + Analog L/R)

New Products

Spec Sheets

Personal Info

HDMI to 1 x 2 HDMI Splitter With Audio Extractor (Digital SPDIF Optical-Toslink + Analog L/R)

Item# 40-HDMI-EXT




Click To View
OUR LATEST CATALOG 61



Product Description

40-HDMI-EXT | The 40-HDMI-EXT HDMI is designed to extract HDMI audio from HDMI signals. Decodes audio to analog 2-channel stereo or to Toslink digital S/PDIF providing multichannel audio up to 5.1. Perfect for Apple TV, Google Chromecast, Xbox One, PS4, Sonos Speaker systems or other HDMI sources, providing a simple method to extract audio from HDMI sources and deliver it to a multi-zone audio system or to a AV receiver without the need of connecting to a TV/Display to hear the audio. Decode audio without HDMI-1, HDMI-2 outputs connected to any displays. Built-In 2 Port HDMI splitter. **New and Improved design for 10/2015-2016**

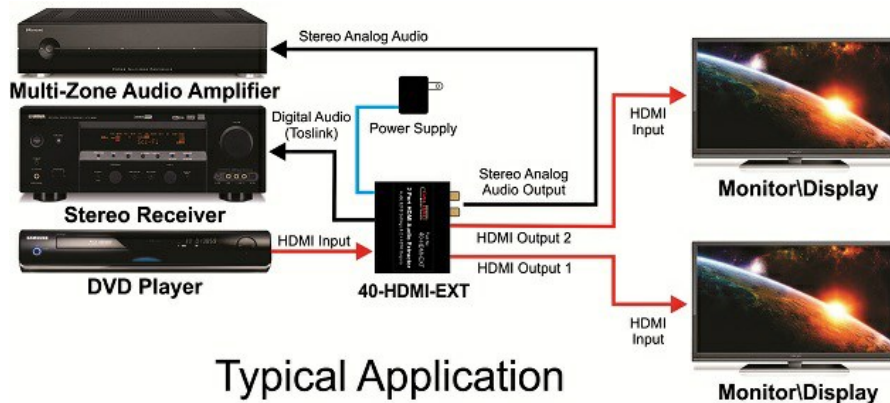

Typical Application

Specifications:

- **HDMI Resolution:** 1080p, 1080i, 720p, 576p, 576i, 480p, 480i @ 24, 50, 60Hz
- **Support Video Color Format:** 24bit/deep color 30bit, 36bit
- **EDID Management:** Supports 3 modes of EDID management for audio formats, can switch among built-in EDID (2/5.1CH) and external EDID (TV)
- **HDMI Input/Output connectors:** 19 Pin
- **Analog Audio Output:** L/R
- **Digital Audio Output:** SPDIF-Optical Toslink
- **Audio Output Format:** Supports SPDIF digital audio format: Dolby digital (AC3), DTS, LPCM, and support 5.1CH, 24-bit/192kHz DAC
- **Selectable Downmix Switch:** 2.1, 5.1
- **Max Bandwidth:** 225MHz
- **Max Baud Rate:** 6.75Gbps
- **Input/Output TMDs Signal:** 0.5~1.5Volts p-p (TTL)
- **Input/Output DDC Signal:** 5Volts p-p (TTL)
- **Input Cable Distance:** <15m 26 Awg HDMI Standard cable
- **Output Cable Distance:** <20m 26 Awg HDMI Standard Cable
- **Max Working Current:** 500mA
- **L.E.D. Indicators:** 1 x Power (Red), 2 x HDMI Signal (Green)
- **Connectors:** 3 x HDMI Female Jacks, 2 x RCA Female Jacks, 1 x 2.1mm DC power Jack, 1 x Toslink Female Jack
- **Power Supply:** 5V DC/1A
- **Operating Humidity Range:** 5 to 90%RH (No Condensation)
- **Size:** L-3.32Açâ, -Å¥ x W-2.45Açâ, -Å¥ x H-.82Açâ, -Å¥
- **Color:** Black
- **Weight:** 35g

Delete Credit/Debit Card
Are you sure you want to delete this card from your saved cards?