

D

C

B

A


D

C

B

A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	11MAY2020	C.W	I.Y

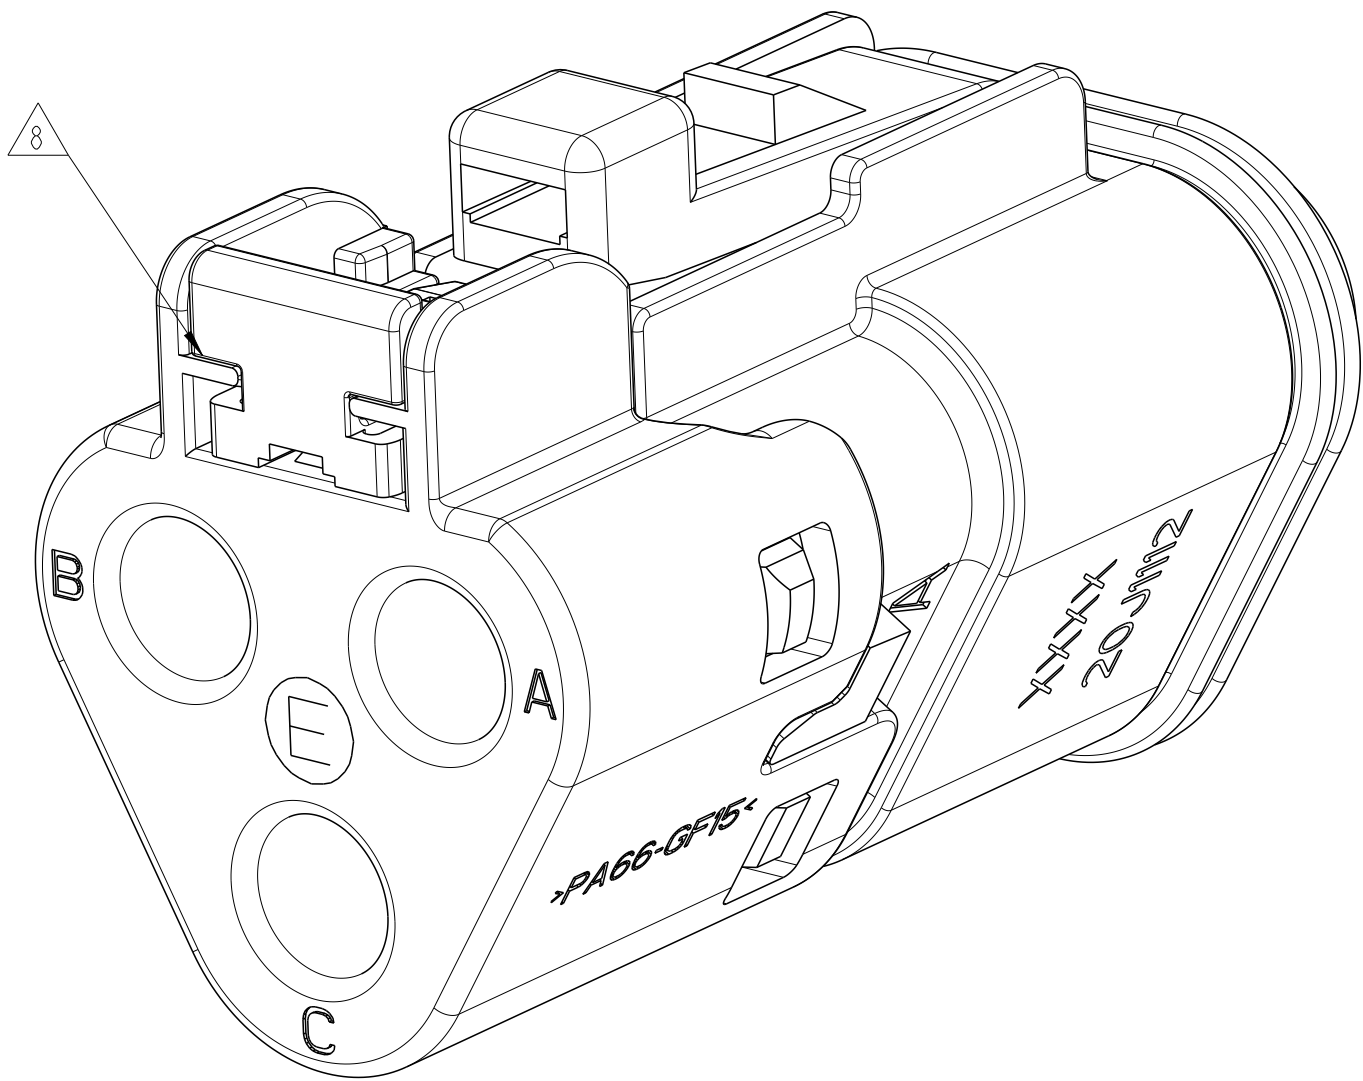

NOTES:

1. SECONDARY WEDGE LOCK SOLD SEPARATELY: W3SX-P012 RECOMMENDED,, WHERE X =A,B,C,D KEY CONFIGURATION.

2. THIS PLUGS MATES WITH DT04-3P-XXXX RECEPTACLES AND ASSOCIATED DT13/15 AND DTF13/15 HEADERS, (XXXX = ALL MODIFICATIONS)

3 MATERIAL: HOUSING&CAP: PA66 GF15, SEE TABLE FOR COLOR
LATCH LOCK: PBT GF15,RED
GROMMET: VMQ, SEE TABLE FOR COLOR
FRONT SEAL: VMQ(RED-ORANGE),EXCEPT TFL1 AND TFL2 ARE FVMQ,SEE TABLE FOR DETAIL

4 DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGITS. (17 = 2017)
MONTH:THIRD DIGIT, EXCLUDING I. A = JAN, B = FEB,
C = MARCH ... (K = OCTOBER)
DAY: FOURTH AND FIFTH DIGITS (14 = 14th DAY)
HOUR:SIXTH AND SEVENTH DIGITS (11 = 11AM)

5 “E” IDENTIFIES E-SEAL.

6. FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE CUSTOMER DRAWING 0425-015-0000.







7 XXXX IDENTIFIES THE MODIFICATION NUMBER, IF APPLICABLE. EXAMPLE: “TEL1” FOR DT06-3S-TEL1.

8 PULL LATCH LOCK COMPONENT TO PRE-LOCK POSITION AS SHOWN BEFORE MATING WITH TAB HOUSING/HEAD CONNECTOR IN CASE OF LATCH LOCK BEING HIT TO END-LOCK POSITION DURING TRANSPORTATION.

CONTACT SIZE	WIRE RANGE	SEALING RANGE	SEAL IDENTIFICATION
#16	14-20AWG (2.5-0.5mm ²)	.088-.145 [2.23-3.68]	STANDARD SEAL N-SEAL
		.053-.120 [1.35-3.05]	EXTRA THIN SEAL E-SEAL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.WAN	16MAR2020	 TE Connectivity			
DIMENSIONS: mm		CHK E.JIANG	16MAR2020				
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH -	APVD I.YIN	16MAR2020	NAME DT SERIES. SNAP CAPS WITH LATCH LOCK 3 WAY PLUG, DT06-3S-TXLX -			
		PRODUCT SPEC 108-151009		SIZE A2	CAGE CODE 00779	DRAWING NO C=2370703	RESTRICTED TO
		APPLICATION SPEC 114-151009					
MATERIAL 	finish_spec_2	WEIGHT -	CUSTOMER DRAWING				
			SCALE 4:1	SHEET 1 OF 2	REV A		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD

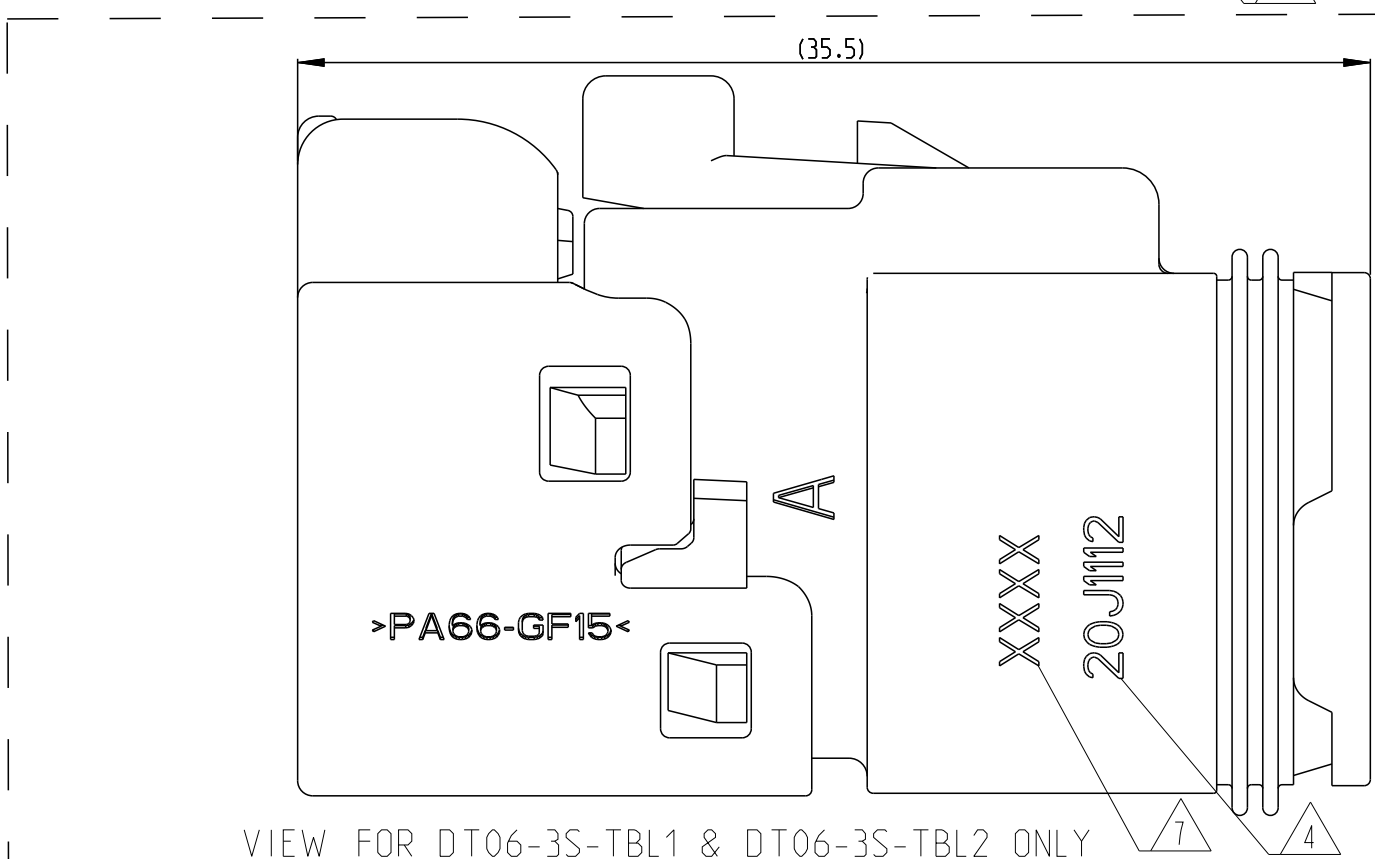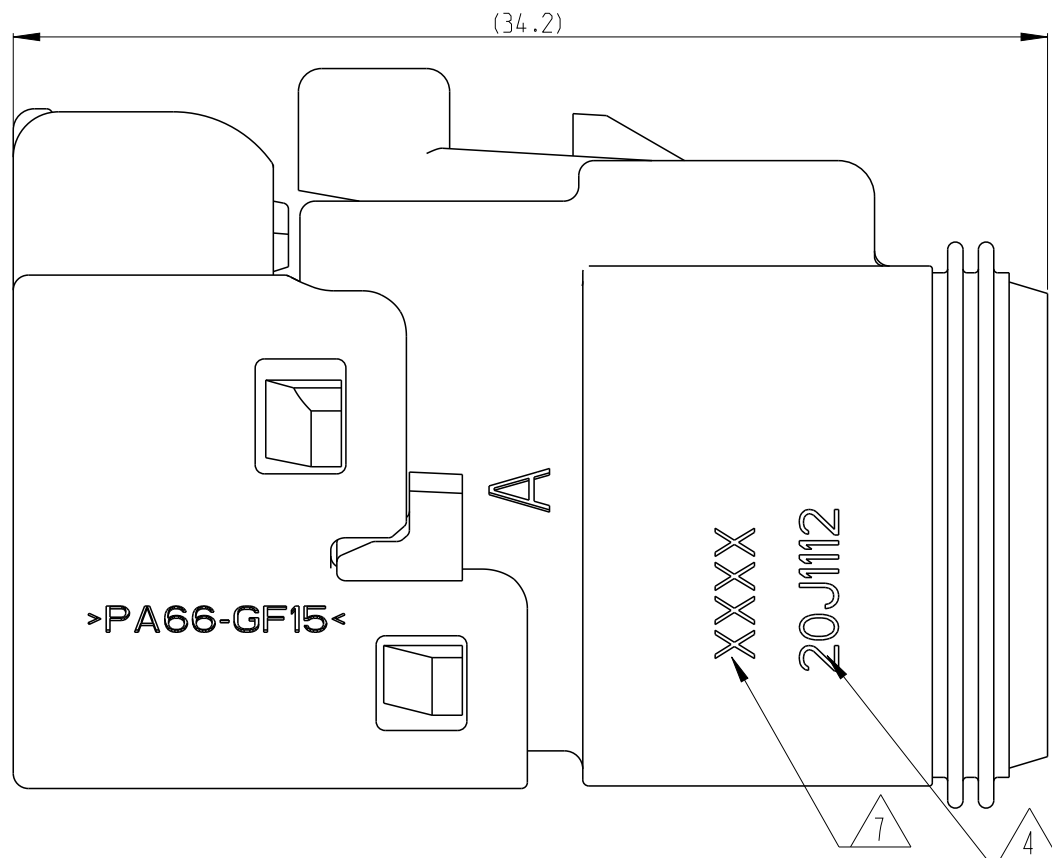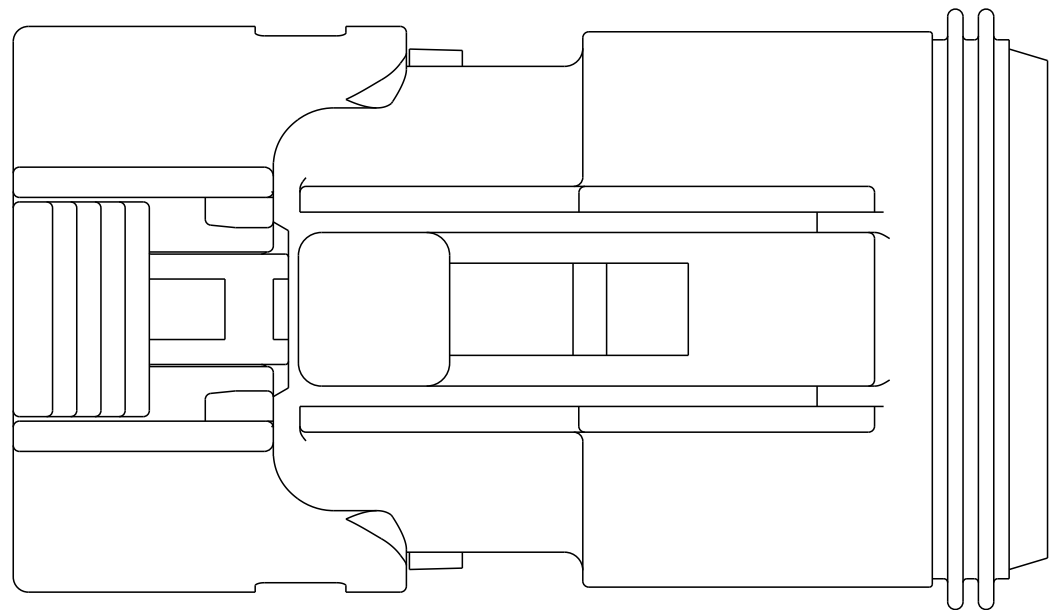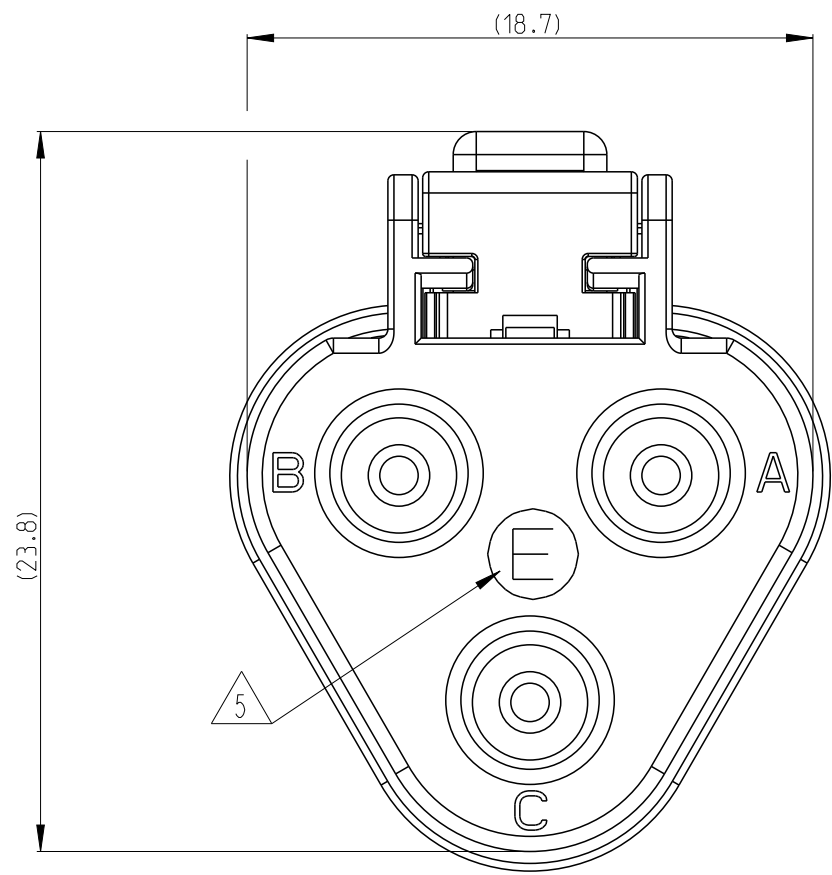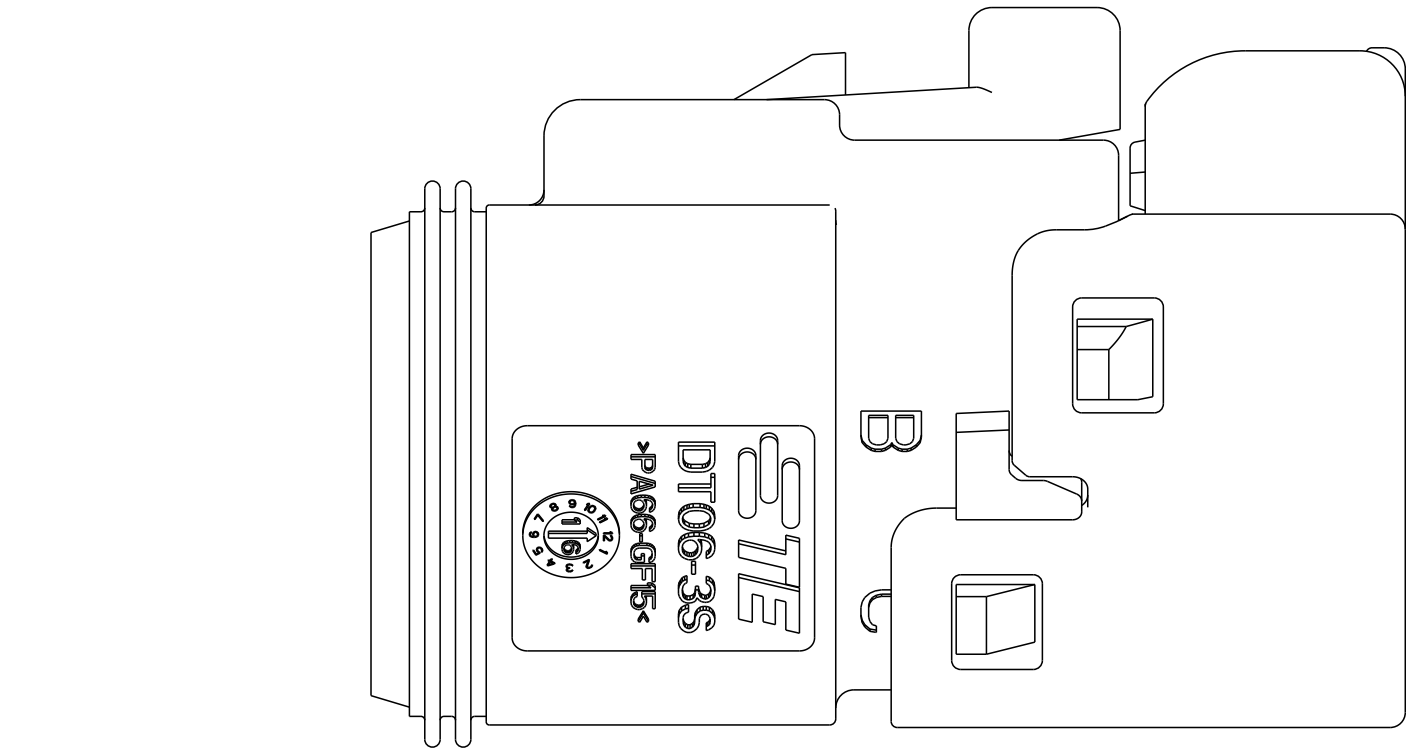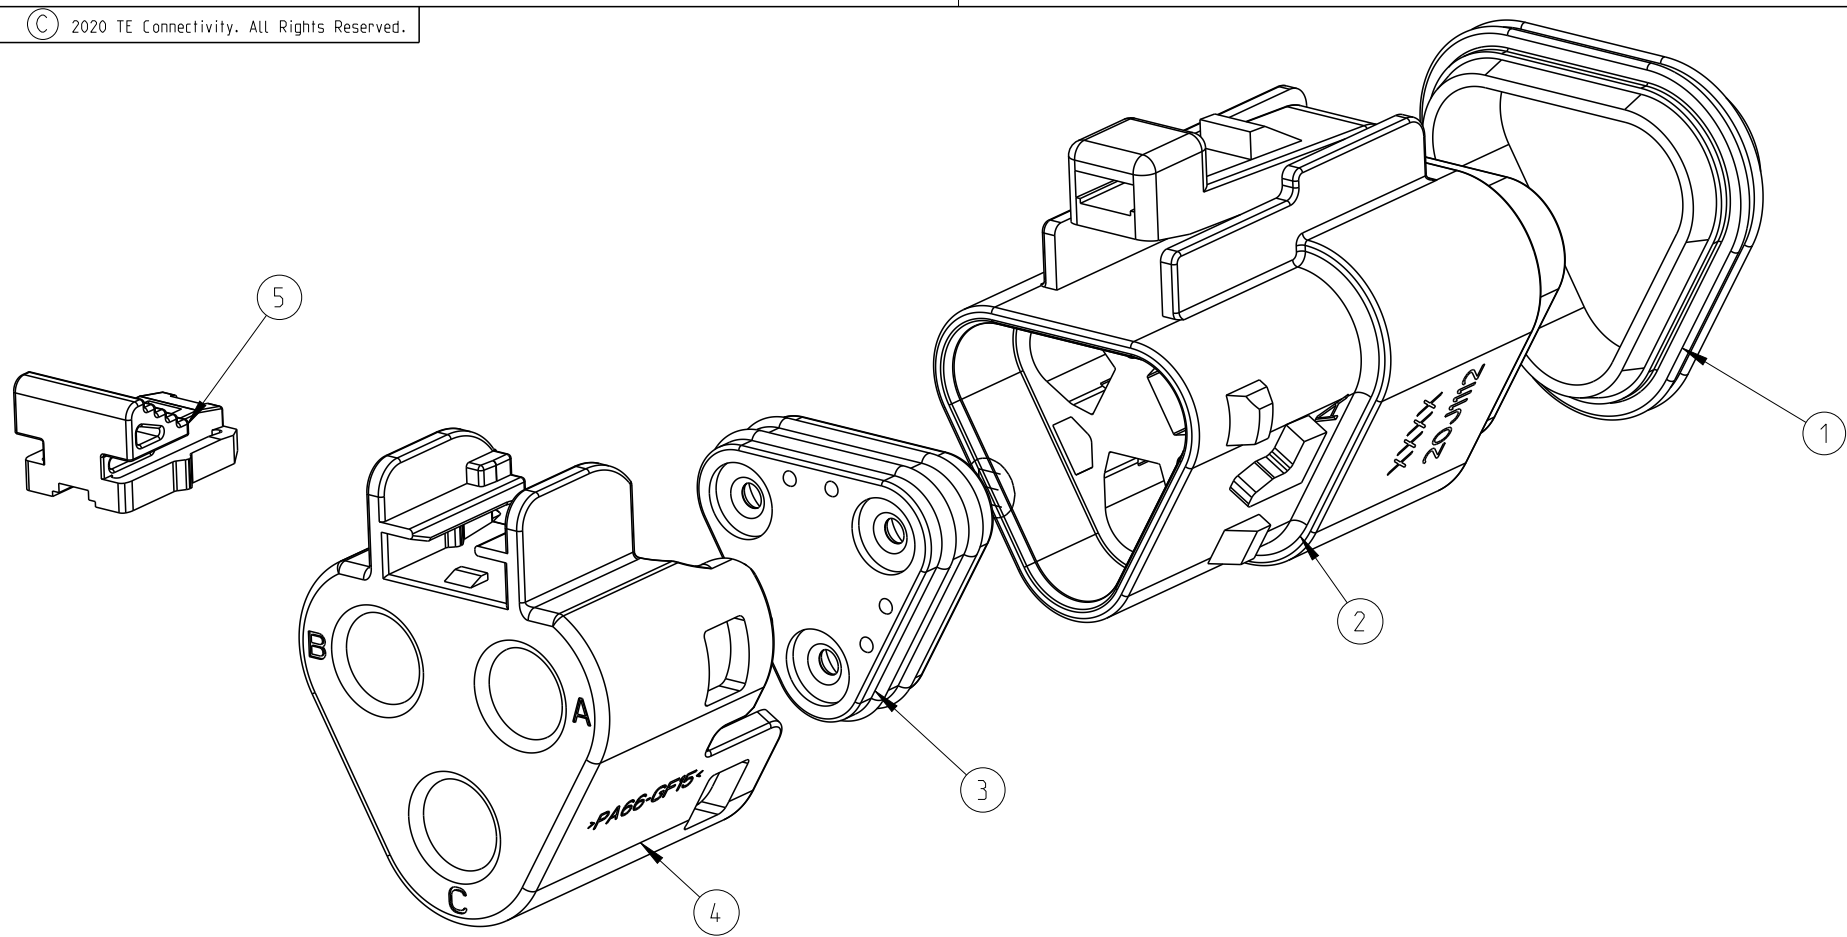

VIEW FOR DT06-3S-TBL1 & DT06-3S-TBL2 ONLY

QTY. REQUEST PER ASSY						COLOR	MATERIAL	DESCRIPTION	ITEM NO
1	1	1	1	1	1	GREEN	PBT-GF30	WEDGE LOCK	6
1	1	1	1	1	1	RED	PBT-GF15	LATCH LOCK	5
1	1	1	1	1	1	GREY	PA-GF15	STD CAP	4
1	1	1	1	1	1	BLACK	PA-GF15	STD CAP	4
1	1	1	1	1	1	ORANGE	VMQ	GROMMET,BLOCKED	3
1	1	1	1	1	1	BURNT RED	VMQ	GROMMET,E-SEAL	3
1	1	1	1	1	1	ORANGE-RED	VMQ	GROMMET,N-SEAL	3
1	1	1	1	1	1	GREY	PA-GF15	HOUSING	2
1	1	1	1	1	1	BLACK	PA-GF15	HOUSING	2
1	1	1	1	1	1	ORANGE	SILICONE	FRONT SEAL	1

QTY. REQUEST PER ASSY						COLOR	MATERIAL	DESCRIPTION	ITEM NO
8.23	7.35	7.35	8.23	7.35	7.35	WEIGHT OF EACH ASSY NO. (g)			
A	A	A	A	A	A	REVISION OF EACH ASSY NO.			
DT06-3S-TBL2	DT06-3S-TEL2	DT06-3S-TNL2	DT06-3S-TBL1	DT06-3S-TNL1	DT06-3S-TEL1	ALIAS			
2--3	2--2	2--1	1--3	1--2	1--1	TE PN			
DT06-3S-CP01	DT06-3S-CE05	DT06-3S-E005-EP06	DT06-3S-C017	DT06-3S-E003-EP04	DT06-3S-CE01	COMPARABLE PART			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.WAN CHK E.JIANG APVD J.YIN	16MAR2020 16MAR2020 16MAR2020	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		NAME DT SERIES. SNAP CAPS WITH LATCH LOCK 3 WAY PLUG, DT06-3S-TXLX	
MATERIAL -		PRODUCT SPEC 108-151009 APPLICATION SPEC 114-151009 WEIGHT -		SIZE A2	CAGE CODE 00779
		CUSTOMER DRAWING		DRAWING NO C-2370703	RESTRICTED TO A
		SCALE 4:1		SHEET 2 OF 2	REV A